





Telescopic forks from Durwen with twin cylinders (two cylinders per fork arm) are ideal for single side loading. Besides saving precious yard space, the time needed for loading / unloading is reduced by 30%! You get your lorry quicker back on the road and have your forklift truck free for other jobs.

twin cylinder type TGZ 25, 35, 40, 50

single cylinder type TGZ 20

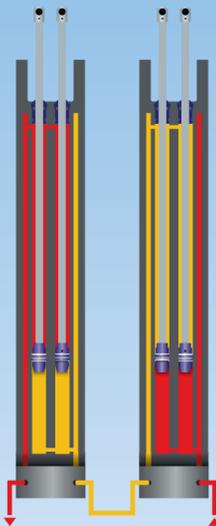

- 2 cylinders per fork arm
- 100% synchronised fork travel
- powerful extension and retraction
- operates fully loaded!

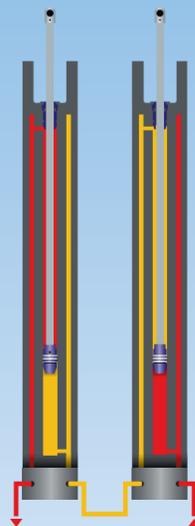

- 1 cylinder per fork arm
- 100% synchronised fork travel
- less weight and smaller width
- may not operate fully loaded
- reduced movement power due to single cylinder design

DURWEN SERVICE - YOUR BACKUP!



Durwen production facilities



Durwen research and development centre



... well prepared to support you



Quick and reliable spare parts supply ...

DURWEN SUPPORT WORLDWIDE



- Made in Germany
- Broad product range
- Worldwide support network
- Worldwide shipping



More than 70 years experience

Durwen Maschinenbau GmbH
August-Horch-Straße 5
D-56637 Plaidt - Germany

Phone: +49 26 32-70 00-0
Fax: +49 26 32-70 00-31

export@durwen.de
www.durwen.de



Durwen shipping department



your partner



More than 70 years experience

Telescopic Forks

INNOVATIVE - VERSATILE - DURABLE



Management System
ISO 9001:2008
www.tuv.com
ID 1100001000

Hydraulic telescopic forks TGZ



standard: comfortable hoist point and handle




easy access to hydraulic connections!




option: computer control system


2 mm extra thick wear resistant steel stripes along full length of underside of fork as standard, with the option of 6 mm extra if required

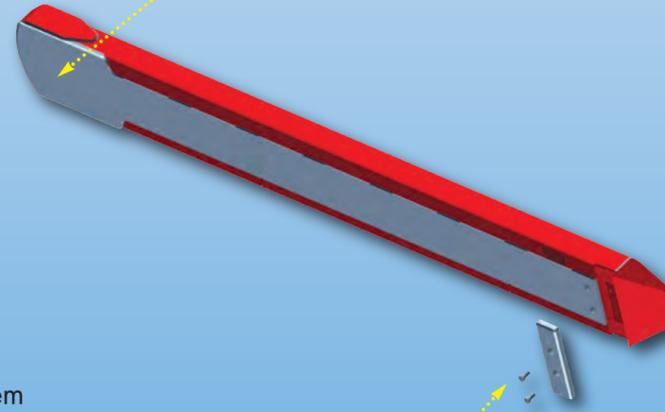

exchangeable wear strip under fork tip as standard, with the option of 6 mm extra if required

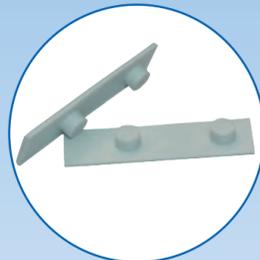


highly wear resistant synthetic wear stripes

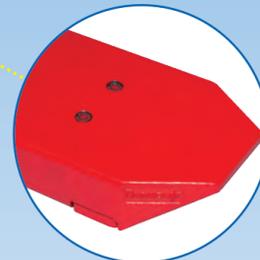

solid one piece fork tip for less damage!

twin cylinders for powerful movement

available with FEM / ISO mounting!

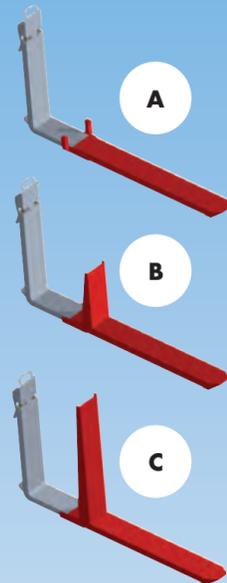


pallet stop optional:
 A) 75 mm, on the fork pocket sides
 B) 400 mm
 C) 850 mm

Save even more time and money! Have sideshift and fork positioning combined with telescopic forks.


Fork positioner type RZV combined with telescopic forks

This combination moves the telescopic forks across full frame width and offers sideshift as well. Three hydraulic functions are required and a combination with a solenoid valve is possible.

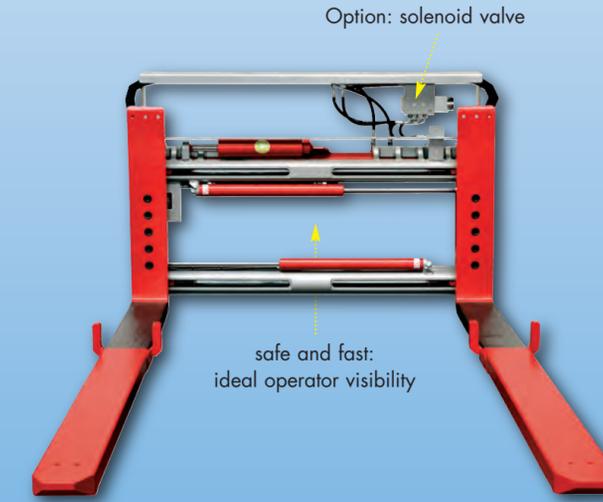


Option: solenoid valve

safe and fast: ideal operator visibility

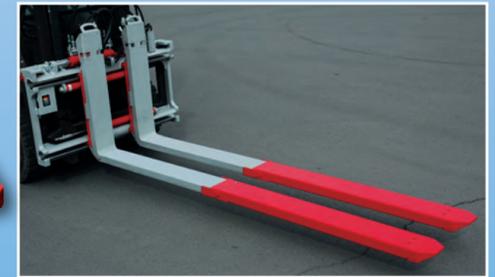

Fork positioner type ZVP combined with telescopic forks


This combination moves the telescopic forks beyond the frame width and offers sideshift as well. Three hydraulic functions are required and a combination with a solenoid valve is possible.

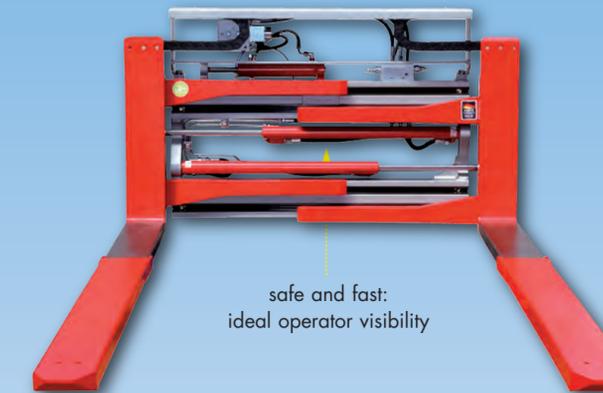

safe and fast: ideal operator visibility



Ideal3: superior lost load centre for high residual capacities

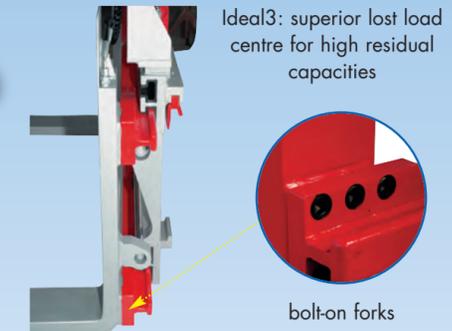

bolt-on forks



Video TGZ-ZVP

