


Fork positioner


RZV

The **fork positioner range RZV** features round bar guides and can also be used with long forks. The well-balanced frame design offers durability and excellent visibility. The forks are moved on adaptors and can open a little wider than the frame width. The adaptor design allows the use of hook-on and/or bolt-on forks. The RZV range is available with constant or integral sideshift.

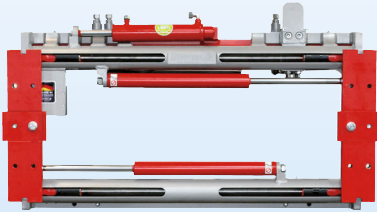

**type RZV-S, constant sideshift,
for hook-on forks**


*sideshift see table

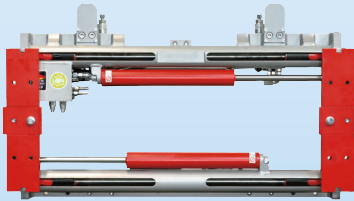

**type RZV, integral sideshift
(via valve), for hook-on forks**


$$\text{max. sideshift} = \frac{\text{max. opening} - \text{min. opening}}{4}$$

min. sideshift = 0

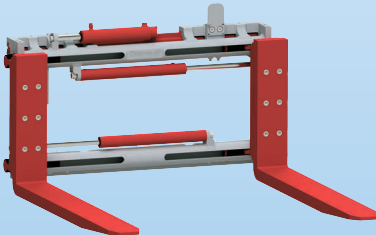

**type RZV-GS, constant sideshift,
with bolt-on forks**

*sideshift see table

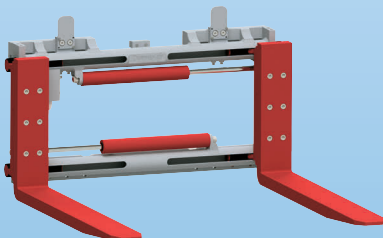

**type RZV-G, integral sideshift
(via valve), with bolt-on forks**

$$\text{max. sideshift} = \frac{\text{max. opening} - \text{min. opening}}{4}$$

min. sideshift = 0




Sideshifting fork positioner

RZV-S
ISO II

constant sideshift, no forks



The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

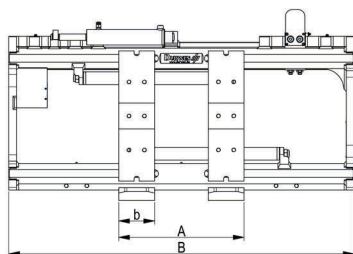


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 20-S	2000/500	1,0-2,0/500	II	980 1000 1040 1100 1150	490-1060 490-1080 490-1120 490-1180 490-1230	120 (80-125)	+/- 100	142	45	132 135 139 140 142
RZV 25-S	2500/500	2,0/600- 2,5/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430				50	135 138 142 147 150 152 160
RZV 28-S	2500/600	2,5/600		1040 1150 1350	490-1120 490-1230 490-1430				50	147 155 165

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

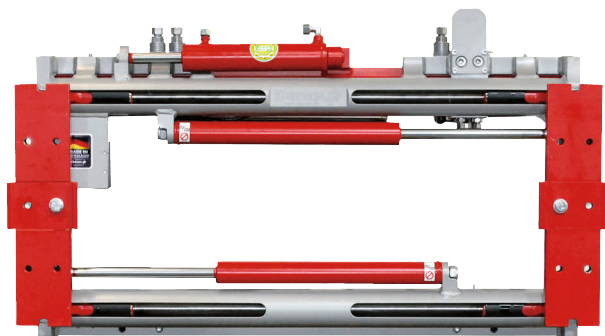

option: protection strip



fork lock



DURWEN
Forklift Attachments

More than 75 years experience

Sideshifting fork positioner

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.


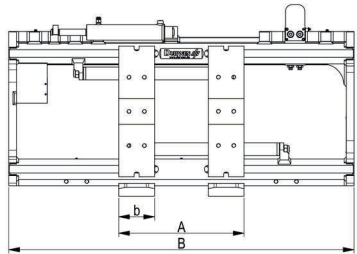


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 30-S	3000/500	3,0/500	III	1040 1100 1150 1200 1350	490-1120 490-1180 490-1230 490-1280 490-1430	125 (80-125)	+/- 100	152	60	168 174 181 187 195
RZV 35-S	3500/500	3,0/600- 3,5/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140 (100-140)		152	62	183 188 194 203
RZV 45-S	5000/600	3,5-5,0/600		1150 1200 1250 1300 1350 1450 1550 1750* 2000**	490-1230 490-1280 490-1330 490-1380 490-1430 490-1530 490-1630 490-1830 490-2080	140 (100-150)		168	70	235 239 244 247 250 258 265 280 315


- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

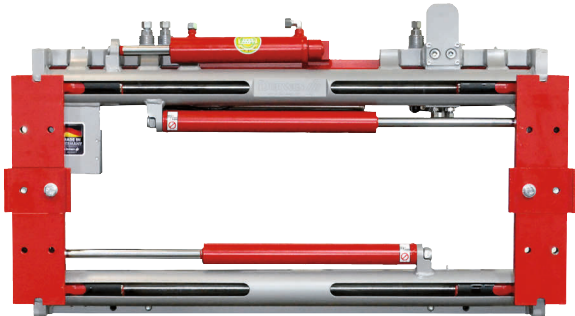

option: protection strip




fork lock

Sideshifting fork positioner

**RZV-S
ISO IV**

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.


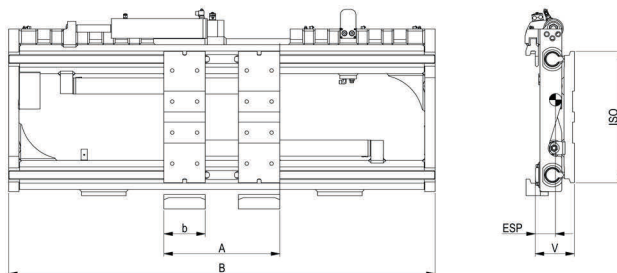


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 50-S	5000/600	5,0/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	+/-100	180	73	345 357 383 409
RZV 60-S	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150	+/- 100 +/- 100 +/- 160 +/- 160 +/- 160	190	75	490 510 540 550 590
RZV 70-S	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	+/- 100 +/- 160 +/- 160	190	73	520 595 645
RZV 80-S	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	190	72	540 590 600 605 650 670 690 740
RZV 100-S	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200	+/- 160	216	70	800 830 855 910
RZV 110-S	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200	+/- 160	218	72	820 875 930


- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240

- quick release hooks (ISO IV) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

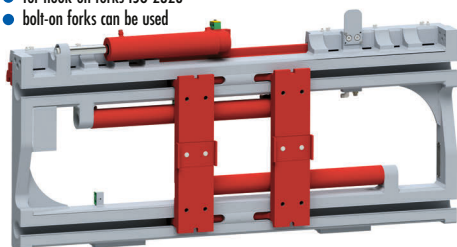

fork lock



option: protection strip

DURWEN
Forklift Attachments


More than 75 years experience

Sideshifting fork positioner

RZV
ISO II



integral sideshift, no forks

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.

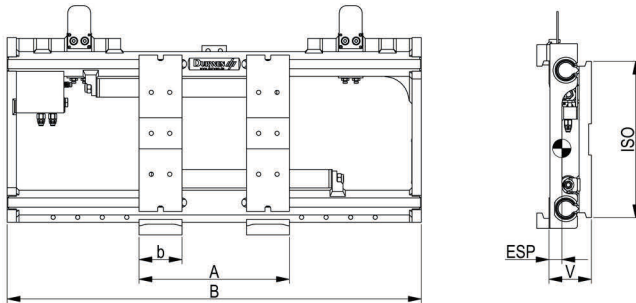


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 25	2500/500	1,5 - 2,5/500	II	980	490-1060	120 (80-125)	126	45	109
				1000	490-1080			45	111
				1040	490-1120			45	118
				1100	490-1180			48	126
				1150	490-1230			50	130
				1200	490-1280			50	135
				1350	490-1430			50	140
RZV 28	2500/600	2,5/600	II	1040	490-1120			45	125
				1150	490-1230			50	137
				1350	490-1430			50	147

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

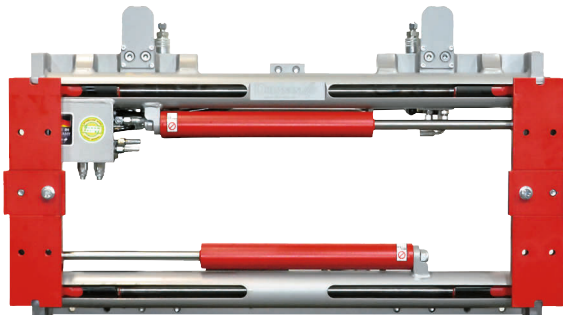

option: protection strip



fork lock

DURWEN
Forklift Attachments


More than 75 years experience

Sideshifting fork positioner

**RZV
ISO III**

integral sideshift, no forks

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.

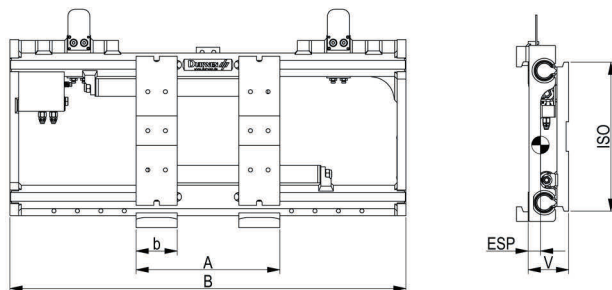


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 30	3000/500	3,0/500	III	1040 1100 1150 1200 1350	490-1120 490-1180 490-1230 490-1280 490-1430	125 (80-125)	138	55 57 60 60 60	145 153 160 166 175
RZV 35	3500/500	3,0/600- 3,5/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140 (100-140)	138	65	162 165 168 180
RZV 45	5000/600	3,5/600- 5,0/600		1150 1200 1250 1300 1350 1450 1550 1750* 2000**	490-1230 490-1280 490-1330 490-1380 490-1430 490-1530 490-1630 490-1830 490-2080	140 (100-150)	153	70	205 208 212 215 220 228 235 250 270


- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed


* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm



option: protection strip



fork lock

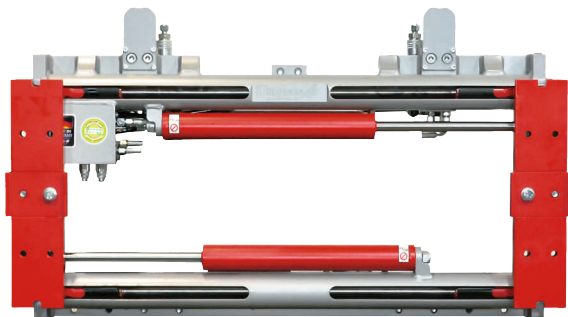


DURWEN
Forklift Attachments

More than 75 years experience

Sideshifting fork positioner



integral sideshift, no forks

The sideshifting fork positioner RZV uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.

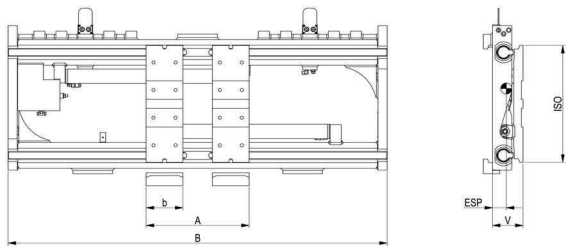


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 50	5000/600	5,0/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140 (120-150)	155	68	292 305 318 331
RZV 60	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150 (150)	165	72	430 450 480 490 530
RZV 70	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	165	74	460 535 545
RZV 80	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200 (150-200)	165	75	485 535 545 547 550 570 590 635
RZV 100	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200 (150-200)	190	70	700 725 750 810
RZV 110	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200 (200)	192	73	715 765 825

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO IV) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

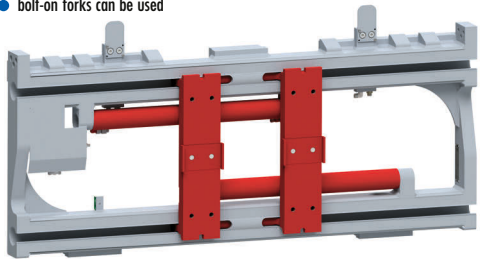

option: protection strip





fork lock

Sideshifting fork positioner

RZV-GS
ISO II



constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

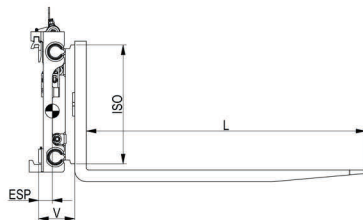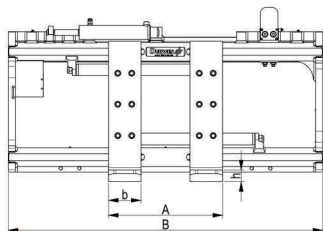

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 16-GS*	1600/500	1,0-1,6/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	+/- 75 +/- 100 +/- 100	142	229 228 224	241 246 254
RZV 20-GS*	2000/500	1,8-2,0/500		850 980 1040 1100 1150	470-910 470-1040 470-1100 470-1160 470-1210	100x45x1200	+/- 75 +/- 100 +/- 100 +/- 100 +/- 100		225 222 221 221 218	246 250 258 262 268
RZV 25-GS*	2500/500	2,5/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430	120x40x1200	+/- 100		220 218 218 218 215 215 213	255 261 263 267 272 275 282
RZV 28-GS*	2500/600	2,5/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200	+/- 100		220 218 215	273 278 288

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

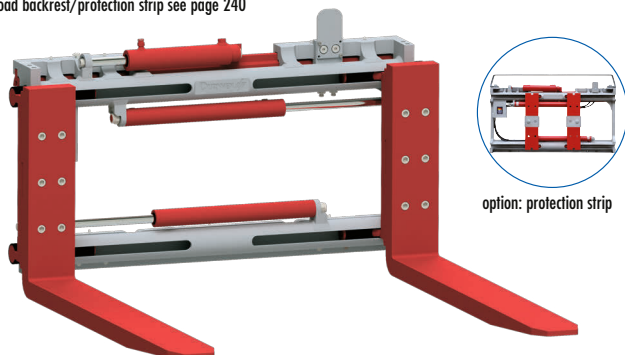

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 16-GS	100x50
RZV 20-GS	100x50
RZV 25-GS	120x50
RZV 28-GS	125x50

DURWEN
Forklift Attachments



More than 75 years experience

Sideshifting fork positioner

RZV-GS
ISO III

constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

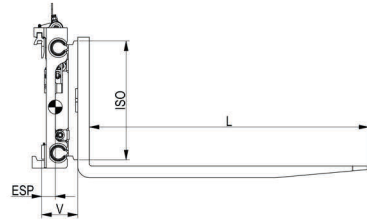



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 30-GS*	3000/500	3,0/500	III	1040	495-1125	125x45x1200	+/- 100	152	210	313
				1100	495-1185				207	320
				1150	495-1235				205	326
				1200	495-1285				204	329
				1350	495-1435				203	340
RZV 35-GS	3500/500	3,0/600- 3,5/500		1100	490-1180	140x50x1200		152	224	362
				1150	490-1230				222	368
				1200	490-1280				221	372
				1350	490-1430				218	383
RZV 40-GS	4000/500	3,5/600- 4,0/500		1150	490-1230	140x50x1200		168	228	415
				1350	490-1430				225	430
				1550	490-1630				220	445
				1750*	490-1830				215	460
				2000**	490-2080				210	495
RZV 45-GS	5000/600	4,0-5/600		1150	500-1240	150x60x1200		168	228	465
				1200	500-1290				227	468
				1250	500-1340				226	472
				1300	500-1390				226	476
				1350	500-1440				225	480
				1450	500-1540				222	488
				1550	500-1640				220	495
				1750*	500-1840				215	510
				2000**	500-2090				210	550

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request

- for forks up to 2400 mm, longer please ask
 - clamping of goods not allowed
- * minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

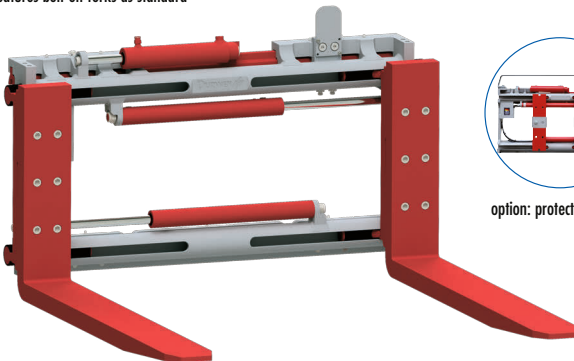

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 30-GS	125x50

DURWEN
Forklift Attachments

More than 75 years experience



PL 01-2024

Sideshifting fork positioner

RZV-GS
ISO IV

constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

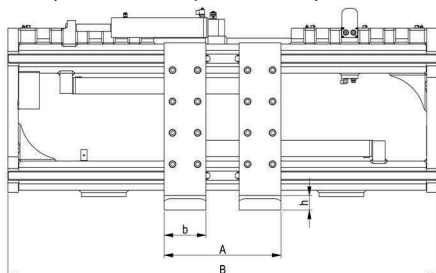



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 50-GS	5000/600	5,0/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	+/- 100	180	278 286 278 271	649 661 687 713
RZV 60-GS	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150x70x1200	+/- 100 +/- 100 +/- 160 +/- 160 +/- 160	190	186 185 184 183 180	790 805 830 840 870
RZV 70-GS	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150x70x1200	+/- 100 +/- 160 +/- 160	190	188 183 180	835 930 980
RZV 80-GS	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200x70x1200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	190	195 189 189 187 186 185 183 179	915 975 985 995 1010 1035 1060 1110
RZV 100-GS	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200x80x1200	+/- 160	216	180 178 175 172	1230 1260 1285 1340
RZV 110-GS	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	+/- 160	218	190 186 183	1292 1348 1403

- 2 hydraulic functions required
- includes hoses and couplings

- constant sideshift as standard
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO IV) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

option: protection strip

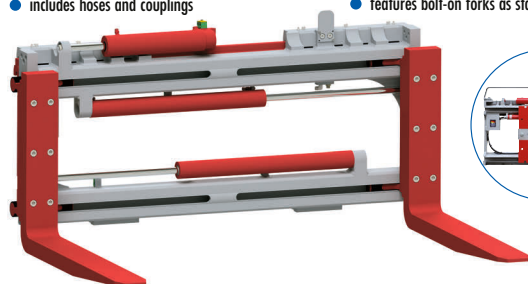



DURWEN
Forklift Attachments

More than 75 years experience

Sideshifting fork positioner

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.

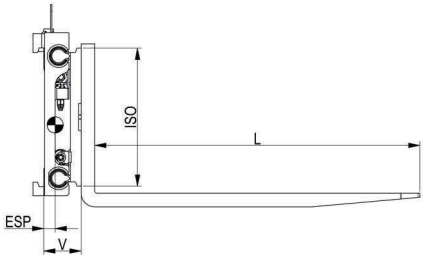
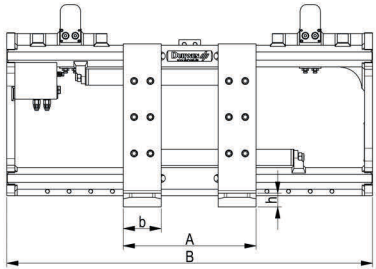


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 16-G*	1600/500	1,0-1,6/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	126	229 228 224	215 220 228
RZV 20-G*	2000/500	1,8-2,0/500		850 980 1040 1100 1150	470-910 470-1040 470-1100 470-1160 470-1210	100x45x1200		225 222 221 219 218	220 224 232 327 242
RZV 25-G*	2500/500	2,0/600-2,5/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430	120x40x1200		220 220 218 216 215 215 213	229 230 239 244 252 257 268
RZV 28-G*	2500/600	2,5/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200		222 225 230	270 275 295

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
RZV 16-G	100x50
RZV 20-G	100x50
RZV 25-G	120x50
RZV 28-G	125x50

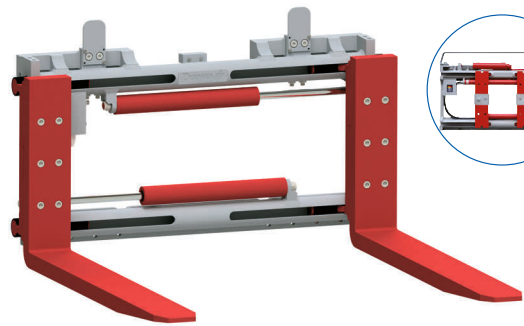



option: protection strip

Sideshifting fork positioner

RZV-G
ISO III

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.

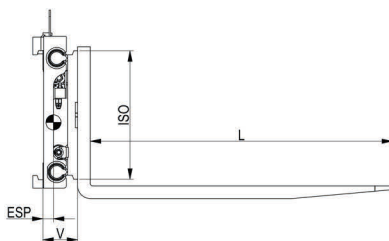



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 30-G*	3000/500	3,0/500	III	1040	495-1125	125x45x1200	138	210	290
				1100	495-1185			208	297
				1150	495-1235			205	305
				1200	495-1285			204	312
				1350	495-1435			203	320
RZY 35-G	3500/500	3,0/600- 3,5/500		1100	490-1180	140x50x1200	138	224	341
				1150	490-1230			222	345
				1200	490-1280			221	349
				1350	490-1430			218	360
RZV 40-G	4000/500	3,5/600- 4,0/500		1150	490-1230	140x50x1200	153	228	388
				1350	490-1430			225	400
				1550	490-1630			220	415
				1750*	490-1830			215	430
				2000**	490-2080			210	480
RZY 45-G	5000/600	4,0-5,0/600		1150	500-1240	150x60x1200	153	228	435
				1200	500-1290			227	439
				1250	500-1340			226	443
				1300	500-1390			226	447
				1350	500-1440			225	450
				1450	500-1540			223	458
				1550	500-1640			220	465
				1750*	500-1840			215	480
				2000**	500-2090			210	530

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

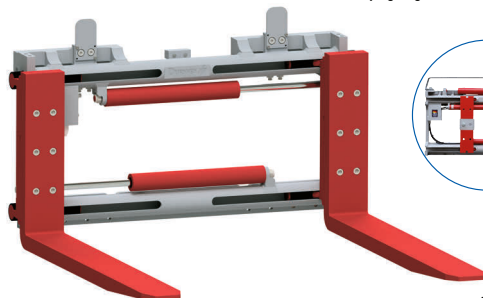

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 30-G	125x50

DURWEN
Forklift Attachments


More than 75 years experience

Sideshifting fork positioner

RZV-G
ISO IV

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.


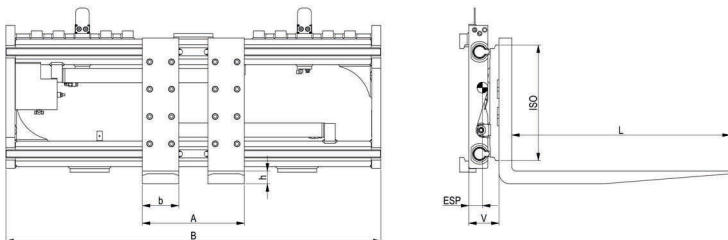


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 50-G	5000/600	5,0/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	163	300 295 290 285	588 601 614 627
RZV 60-G	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150x70x1200	165	186 185 184 183 180	730 745 770 780 810
RZV 70-G	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150x70x1200	165	188 183 180	765 845 885
RZV 80-G	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200x70x1200	165	195 189 189 187 186 185 183 179	790 875 890 920 930 955 980 1030
RZV 100-G	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200x80x1200	190	180 178 175 172	1120 1150 1180 1210
RZV 110-G	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	192	190 185 182	1185 1242 1272

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range

- features bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO IV) upon request

- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

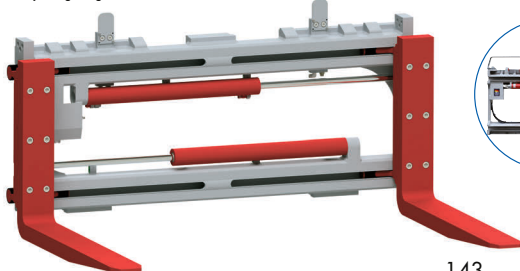

option: protection strip


DURWEN
Forklift Attachments

More than 75 years experience

Fork positioner for reach truck, no sideshift

RZV


The **fork positioner range RZV** features round bar guides and can also be used with long forks. The well balanced frame design offers durability and excellent visibility. This model range features a small frame that supports the configuration of reach trucks. Clamping of goods is not allowed.

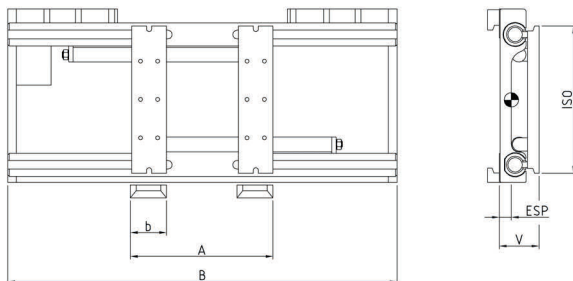

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b mm	V LLC mm	ESP COG mm	weight kg
RZV 25	2500/500	1,5-2,5/500	II	750 800 850 880	490-750 490-800 490-850 490-880	120	126	42	100 110 120 125
RZV 28	2500/600	2,5/600		750 800 850 880	490-750 490-800 490-850 490-880				110 115 125 130

- 1 hydraulic function required
(2 hydraulic functions with integral sideshift)
- includes hoses and couplings
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- please indicate fork width when ordering
- integral sideshift upon request
- **LLC spacer kit upon request (can increase LLC in steps up to 50 mm)**
- clamping of goods not allowed

Important note: The reach truck must be equipped with a collision prevention that prevents collision of fork positioner parts with the wheel legs or parts of the reach truck. This means usually that fork positioning and sideshift must be shut off with the attachment between the wheel legs. The reach truck carriage design must accommodate the mounting of an attachment. A **spacer kit** is available from Durwen. It allows the extension of the attachment mounting up to 50 mm giving extra space for carriage parts or reach truck parts that may protrude into the attachment mounting or operation space.

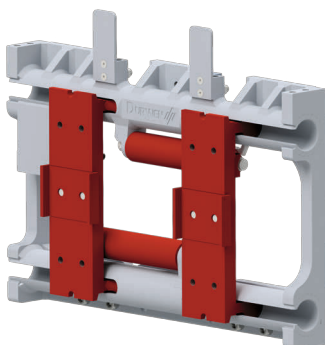


DURWEN 
Forklift Attachments

More than 75 years experience

Fork positioner for reach truck, no sideshift, bolt-on forks

The fork positioner range **RZV G** features round bar guides and can also be used with long forks. The well balanced frame design offers durability and excellent visibility. This model range features a small frame that supports the configuration of reach trucks. Clamping of goods is not allowed.

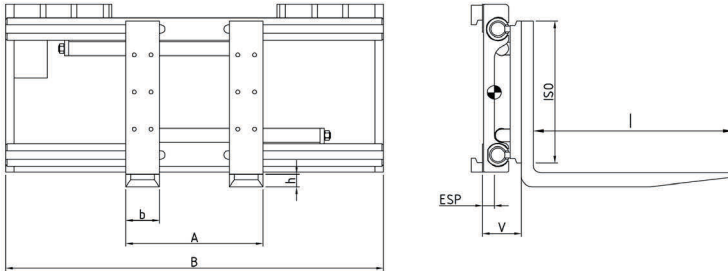


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x l mm	V LLC mm	ESP COG mm	weight kg
RZV 16-G*	1600/500	1,0-1,6/500	II	750 800 850 880	470-730 470-780 470-830 470-860	100x40x1200	126	285 273 263 258	198 208 218 223
RZV 20-G*	2000/500	1,8-2,0/500		750 800 850 880	470-730 470-780 470-830 470-860	100x45x1200		299 287 277 272	210 220 230 235
RZV 25-G*	2500/500	2,5/500		750 800 850 880	490-750 490-800 490-850 490-880	120x40x1200		307 295 284 279	218 228 238 243
RZV 28-G*	2500/600	2,5/600		750 800 850 880	495-755 495-805 495-855 495-885	125x45x1200		326 315 304 299	238 248 258 263

- 1 hydraulic function required (2 hydraulic functions with integral sideshift)
- includes hoses and couplings
- features bolt-on forks as standard (type RZV-G)
- load backrest/protection strip see page 240
- integral sideshift upon request
- ideshift upon request
- LLC spacer kit upon request (can increase LLC in steps up to 50 mm)
- clamping of goods not allowed

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 16-G	100x50
RZV 20-G	100x50
RZV 25-G	120x50
RZV 28-G	125x50

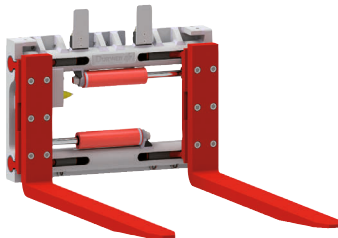


Important note: The reach truck must be equipped with a collision prevention that prevents collision of fork positioner parts with the wheel legs or parts of the reach truck. This means usually that fork positioning and sideshift must be shut off with the attachment between the wheel legs. The reach truck carriage design must accommodate the mounting of an attachment. A **spacer kit** is available from Durwen. It allows the extension of the attachment mounting up to 50 mm giving extra space for carriage parts or reach truck parts that may protrude into the attachment mounting or operation space.

Fork positioner

RZV-I
ISO II/III

integrated, integral sideshift, no forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.

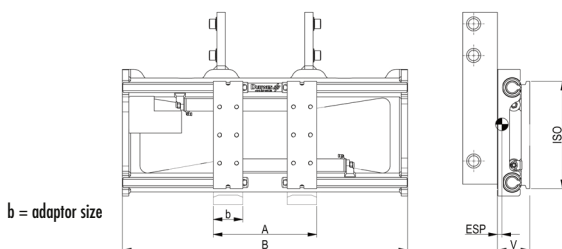


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 25-I	2500/500	1,5 - 2,5/500	II	980	490-1060	120	126	50	130
				1040	490-1120				135
				1150	490-1230				142
				1350	490-1430				155
RZV 28-I	2500/600	2,5/600	II	1040	490-1120	120	126	50	130
				1150	490-1230				142
				1350	490-1430				155
RZV 30-I	3000/500	3,0/500	III	1040	490-1120	120	138	55	160
				1150	490-1230				168
				1350	490-1430				180
RZV 35-I	3500/500	3,0/600- 3,5/500	III	1150	490-1230	140	138	55	170
				1350	490-1430				190
RZV 45-I	5000/500	3,5/600- 5,0/500	III	1150	490-1230	140	153	60	222
				1350	490-1430				240
				1550	490-1630				260
				1750	490-1830				280
				2000	490-2080				305
RZV 48-I	5000/600	5,0/600	III	1150	490-1230	140	153	60	227
				1350	490-1430				245
				1550	490-1630				265
				1750	490-1830				285
				2000	490-2080				310

- 2 hydraulic functions required
- without hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

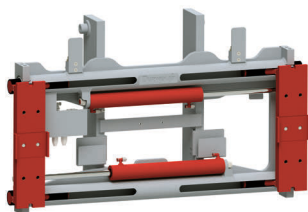


DURWEN 
Forklift Attachments

More than 75 years experience

Fork positioner



integrated, integral sideshift, no forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.

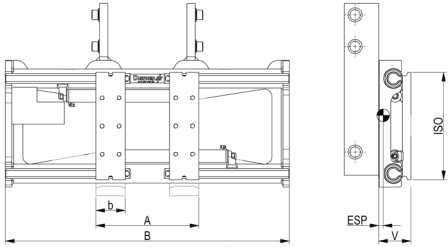

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg			
RZV 50-I	5000/600	5,0/600	IV	1350 1450 1550	490-1430 490-1530 490-1630	140	163	65	300 315 330			
RZV 60-I	6000/600	6,0/600		1460 1860	560-1560 560-1960	150	165	65	425 485			
RZV 70-I	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	165	65	435 495 530			
RZV 80-I	8000/600	8,0/600		1460 1800 1860	560-1560 560-1900 560-1960	200	165	65	465 515 525			
				2060 2160 2260	560-2160 560-2260 560-2360				555 573 590			
				2400	560-2500				620			
				RZV 100-I	8000/900	8,0/900	2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200	190	75	715 738 760 810
							2060 2260 2400	560-2160 560-2360 560-2500				200

- 2 hydraulic functions required
 - without hoses and couplings
 - includes sideshift via valve, depending on opening range
 - for hook-on forks ISO 2328
 - bolt-on forks can be used
- forks not included
 - please indicate fork width when ordering
 - including brackets, chain anchor and stub shafts, without rollers
 - detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
 - LLC does not include forks
 - protection strip/load backrest see page 240
 - for forks up to 2400 mm, longer please ask
 - clamping of goods is not allowed

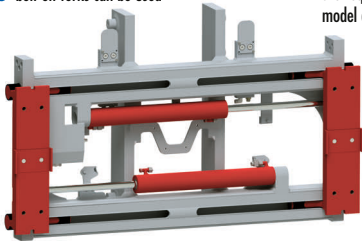


option: protection strip

Fork positioner

**RZV-IG
ISO II**

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.

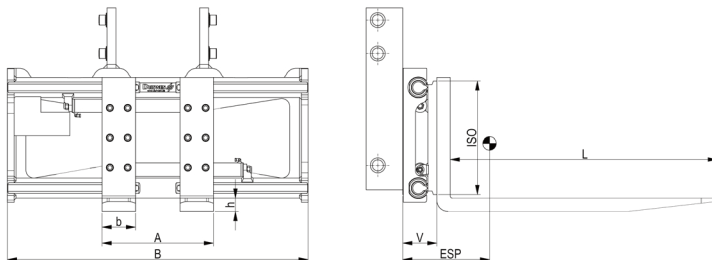



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 16-IG*	1600/500	1,0-1,6/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	126	255 250 250	215 225 235
RZV 20-IG*	2000/500	1,8-2,0/500		850 980 1040 1150	470-910 470-1040 470-1100 470-1210	100x45x1200		280 270 265 265	225 240 245 250
RZV 25-IG*	2500/500	2,0/600-2,5/500		980 1040 1150 1350	490-1060 490-1120 490-1230 490-1430	120x40x1200		270 270 270 265	245 255 260 270
RZV 28-IG*	2500/600	2,5/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200		295 290 285	273 280 305

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
RZV 16-IG	100x50
RZV 20-IG	100x50
RZV 25-IG	120x50
RZV 28-IG	125x50

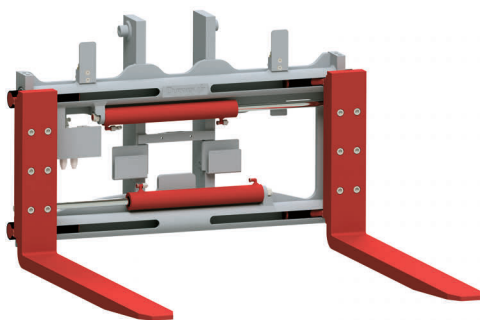

option: protection strip


DURWEN
Forklift Attachments

More than 75 years experience

Fork positioner

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.


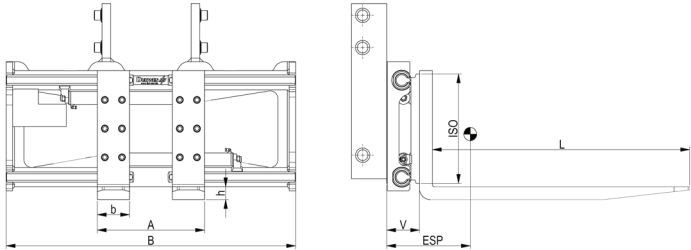


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 30 -IG*	3000/500	3,0/500	III	1040	495-1125	125x45x1200	138	273	300
				1150	495-1235			270	310
				1350	495-1435			265	325
RZV 35-IG	3500/500	3,0/600- 3,5/500		1150	490-1230	140x50x1200	138	295	350
				1350	490-1430			285	365
RZV 40-IG	4000/500	3,5/600- 4,0/500		1150	490-1230	140x50x1200	153	270	410
				1350	490-1430			260	430
				1550	490-1630			250	450
				1750	490-1830			240	520
				2000	490-2080			230	535
RZV 45-IG	5000/500	4,0/600- 5,0/500		1150	500-1240	150x60x1200	153	300	455
				1350	500-1440			290	478
				1550	500-1640			280	495
				1750	500-1840			270	515
				2000	500-2090			260	565
RZV 48-IG	5000/600	5,0/600		1150	500-1240	150x60x1200	153	300	460
				1350	500-1440			290	490
				1550	500-1640			280	505
				1750	500-1840			270	520
				2000	500-2090			260	570

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
RZV 30-IG	125x50

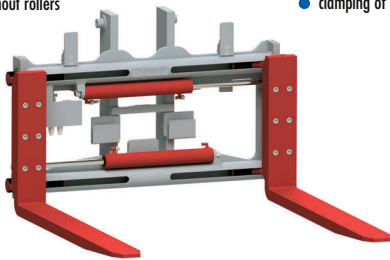

option: protection strip



Fork positioner

**RZV-IG
ISO IV**

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity.



Delivery incl. brackets, stubshafts and chain anchors.

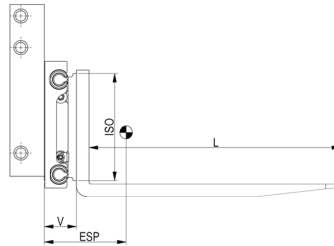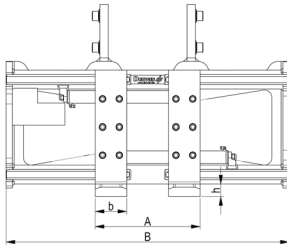

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 50-IG	5000/600	5,0/600	IV	1350 1450 1550	500-1440 500-1540 500-1640	150x70x1200	163	295 290 285	600 615 630
RZV 60-IG	6000/600	6,0/600		1460 1860	560-1560 560-1960	150x70x1200	165	240 225	710 770
RZV 70-IG	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150x70x1200	165	235 220 215	720 780 820
RZV 80-IG	8000/600	8,0/600		1460 1800 1860 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200x70x1200	165	270 245 240 235 233 225 220	830 885 895 930 948 965 995
RZV 100-IG	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200x80x1200	190	240 238 235 230	1135 1160 1185 1230
RZV 110-IG	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	192	243 238 233	1150 1200 1245

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

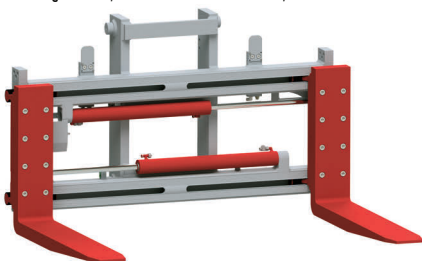

option: protection strip

DURWEN
Forklift Attachments

More than 75 years experience