




Overview multiple fork positioners




type DPK for 1-2 pallets

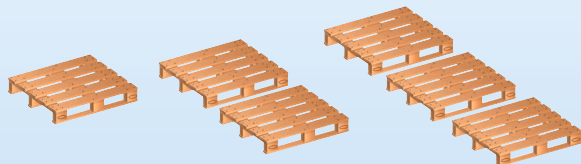


type DRPK for 1-2-3 pallets

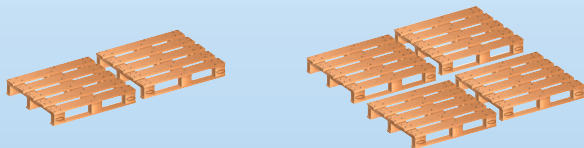


type DPK for 2-4 pallets

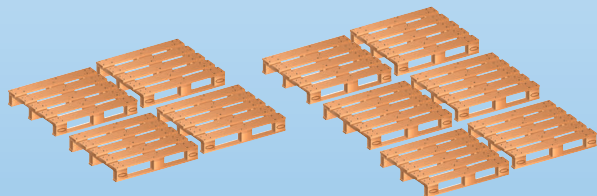

type SPK for 4-6 pallets

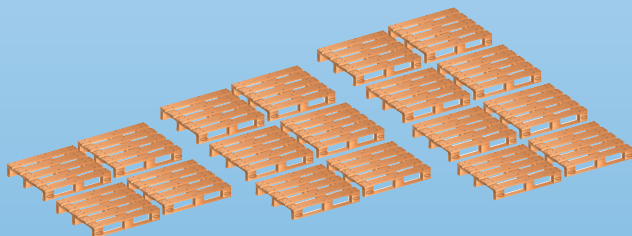


type VPK for 4-6-8 pallets

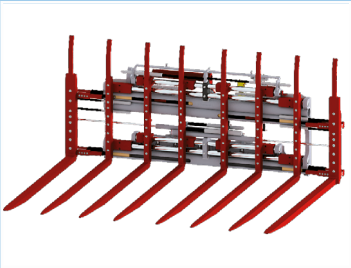

Double fork positioner for 1-2 pallets

DPK-C
DPK-P

The double fork positioner DPK-C can pick up one or two pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility.

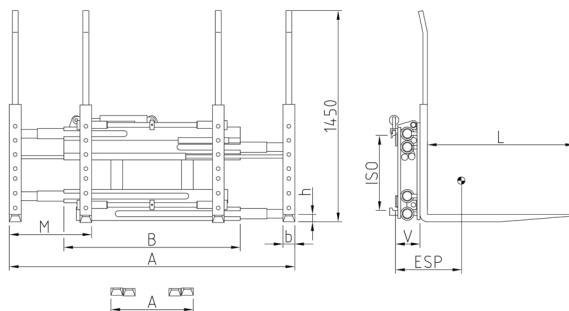

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 16-C	1600/600	1,5-1,8/600	II	1050	560-1790	560	80x40x1200	+/- 100	165	240	475
DPK 22-C	2200/600	2,0-2,5/500	II	1200	560-1940	560	80x40x1200	+/- 100	165	260	495
DPK 22-C2	2200/600	2,0-2,5/500	II	1200	660-2140	660	80x40x1200	+/- 100	165	248	515
DPK 25-C	2500/600	2,5/600	II	1200	560-1940	560	80x50x1200	+/- 100	165	260	535
DPK 25-C2	2500/600	2,5/600	II	1200	660-2140	660	80x50x1200	+/- 100	165	248	555
DPK 25-C3	2500/600	2,5/600	II	1300	560-2040	560	80x50x1200	+/- 100	165	260	602
DPK 30-C	2600/600	3,0/500	III	1200	560-1940	560	80x50x1200	+/- 100	165	250	540
DPK 30-C2	2600/600	3,0/500	III	1200	660-2140	660	80x50x1200	+/- 100	165	250	565
DPK 30-C3	2600/600	3,0/500	III	1300	560-2040	560	80x50x1200	+/- 100	165	225	595
DPK 32-C	2800/600	3,5/500	III	1200	560-1940	560	80x50x1200	+/- 100	185	235	585
DPK 32-C2	2800/600	3,5/500	III	1300	660-2140	660	80x50x1200	+/- 100	185	235	620
DPK 32-C3	2800/600	3,5/500	III	1300	560-2040	560	80x50x1200	+/- 100	185	235	640
DPK 35-C	3200/600	3,0/600-4,0/500	III	1200	560-1940	560	80x60x1200	+/- 100	185	230	635
DPK 35-C2	3200/600	3,0/600-4,0/500	III	1300	660-2140	660	80x60x1200	+/- 100	185	230	670
DPK 35-C3	3200/600	3,0/600-4,0/500	III	1300	560-2040	560	80x60x1200	+/- 100	185	230	690
DPK 40-C	4500/600	4,0-5,0/600	III	1400	560-1940	560	80x60x1200	+/- 150	195	215	750
DPK 40-C2	4500/600	4,0-5,0/600	III	1400	660-2140	660	80x60x1200	+/- 150	195	210	780
DPK 40-C3	4500/600	4,0-5,0/600	III	1400	560-2040	560	80x60x1200	+/- 150	195	215	750
DPK 50-P	5500/600	5,0-6,0/600	IV	1420	560-1940	560	80x65x1200	+/- 150	171	206	895


- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- no sideshift ISO II, III, IV upon request, data change please ask
- optional with high visibility load backrest ISO II, III upon request, ISO IV not available



automatic lubrication system:
DPK 16 - 30 C upon request
(sideshift top and bottom)
DPK 32 - 100 C upon request (sideshift top)

- single pair control upon request
- scanner holder upon request




DURWEN
Forklift Attachments

More than 75 years experience

Double fork positioner for 2-4 pallets

DPK-C
DPK-P

The double fork positioner **DPK-C** can pick up two or four pallets through hydraulic fork positioning and extra fork length. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility. With the extended forks it is possible to load and unload vehicles from one side. Sideshift is fitted as standard.

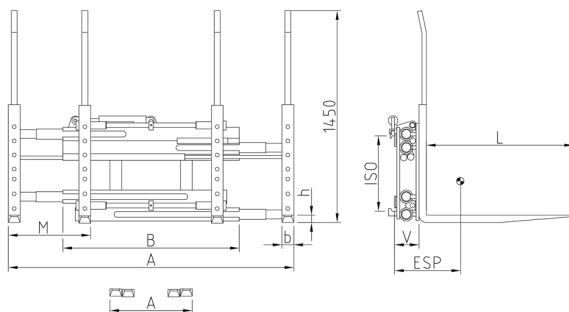

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 34-C	1600/1200	3,5-4,0/500	III	1200	560-1940	560	80x60x2400	+/- 100	185	620	815
DPK 45-C	2500/1200	4,0/600-5,0/500	III	1400	560-1940		80x65x2400	+/- 150	195	520	970
DPK 48-C	2800/1200	5,0/600	III	1400	560-1940		80x65x2400	+/- 150	195	505	995
DPK 60-P	3600/1200	5,0-6,0/600	IV	1420	560-1940		80x65x2400	+/- 150	171	490	1095
DPK 80-P	4600/1200	7,0-8,0/600	IV	1420	560-1940		80x70x2400 100x65x2400	+/- 150	171	485	1190
DPK 100-P	5600/1200	8,0/900	IV	1800	580-1960		90x70x2400 105x65x2400	+/- 150	181	483	1425
DPK 120-P	7000/1200	8,0/900	IV	2000	580-1960		90x70x2400 105x65x2400	+/- 150	181	477	1480
DPK 180-C1-*	9600/1200	15,0/600	integrated	2550	750-2080		160x70x2400	+/- 200	390	415	3800

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- no sideshift ISO II, III, ISO IV upon request, data change, please ask
- optional with high visibility load backrest ISO II, III upon request, ISO IV not available



automatic lubrication system:

DPK 34-C - DPK 55-C upon request (sideshift top)

DPK 60-CP - DPK 120-CP upon request

- single pair control upon request
- scanner holder upon request

* weight without brackets / COG is without brackets, from front edge of brackets / LLC is from front edge of brackets

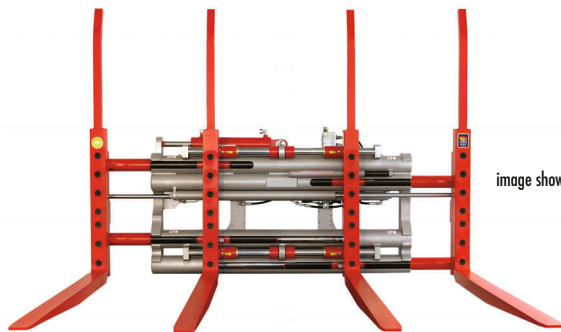


image shows DPK 45 C

DURWEN
Forklift Attachments

More than 75 years experience