


Foam clamp

USK

integral sideshift

The **foam clamp USK** is ideal for foam block handling. The tubular arm construction allows for safe and careful handling. The arms are bolted to the double T profile carriers.

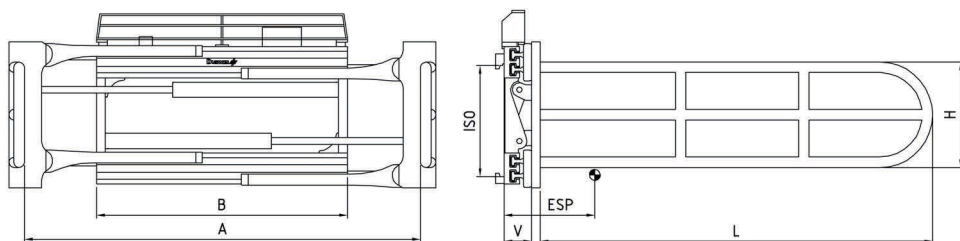

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	height H mm	length L mm	V LLC mm	ESP COG mm	weight kg
USK 20	800/1000	1,0-2,0/500	II	1050	600-1900	450	1600	126	320	470
				1050	600-1900		1800		370	480
				1150	750-2250		1600		310	485
				1150	750-2250		1800		360	505
				1350	850-2480		1600		300	520
				1350	850-2480		1800		350	540
				1550	600-2400		1600		290	555
				1550	600-2400		1800		340	570
				1650	600-2500		1600		280	575
				1650	600-2500		1800		330	590

- 2 hydraulic functions required
- includes hoses and couplings
- load backrest type LS-K see page 239
- bolt-on arms as standard
- different arm length upon request
- constant sideshift upon request

