


Triple fork positioner for 1-2-3 pallets

The triple fork positioner DRPK-C can pick up one, two or three pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. Sideshift is fitted as standard.

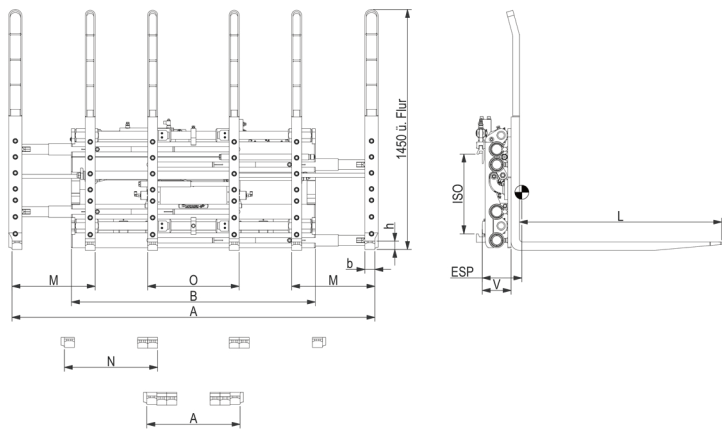

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A AK-AK mm	M/N/O mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DRPK 25-C	2500/600	2,5/600	II	1630	560-2285	500/560/550	60x50x1200	+/- 100	173	230	745
DRPK 30-C	3000/600	3,0-3,5/600	III	1465	560-2240	530/590/550	60x50x1200		173	235	730
				1630	560-2285	500/560/550				235	745
				1795	560-2450	500/560/550				233	770
DRPK 45-C	3800/600	4,0-5,0/600	III	1630	560-2285	500/560/550	60x60x1200		173	240	800
				1795	560-2450					237	825
				2006	560-2660					220	880
				2285	560-2940					225	945
DRPK 50-C	4500/600	5,0/600	IV	1980	560-2760	510/570/580	60x65x1200	233	235	1220	

- 2 hydraulic functions required
 - includes hoses and couplings
 - constant sideshift as standard
- no sideshift class II and III, class IV upon request, data change, please ask
 - optional with high visibility load backrest ISO II, III upon request, ISO IV not available

-  automatic lubrication system:
DRPK 25- C - DRPK 50-C upon request
- single pair control upon request
 - scanner holder upon request



image shows DRPK 45 C with option:
high visibility load backrest