


Bale clamp

integral sideshift

The **bale clamp PBK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allow for dense stacking of bales. An integral sideshift is fitted as standard.

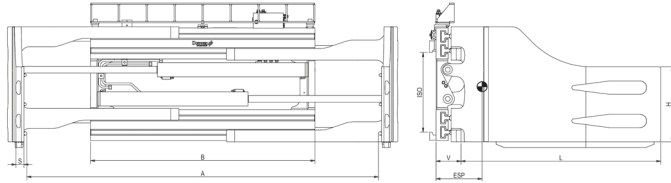

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	ESP COG mm	weight kg
PBK 20	1650/500	1,5-2,0/500	II	980	530-1710	350	800	30 (92)	128	198	435
				980	520-1700		1000			233	470
				1050	570-1770		800			194	445
				1050	560-1760		1000			229	480
PBK 25	2300/500	2,0-2,5/600	II	980	520-1700	350	1000	30 (92)	138	233	488
				980	510-1690		1200			283	523
				1050	560-1760		1000			229	500
				1050	550-1750		1200			283	535
				1150	560-1860		1000			222	520
				1150	550-1850		1200			277	555
PBK 30	2700/500	3,0/500	III	980	530-1710	400	1000	30 (93)	138	238	575
				980	520-1700		1200			308	640
				1050	570-1770		1000			234	585
				1050	560-1760		1200			304	650
				1150	570-1870		1000			227	605
				1150	560-1860		1200			297	670
				1350	610-2260		1000			210	655
				1350	600-2250		1200			280	720
PBK 35	3000/500	3,0/600- 3,5/500	III	1150	570-1870	450	1000	40 (110)	141	230	805
				1150	560-1860		1200			300	850
				1350	610-2260		1000			225	860
				1350	600-2250		1200			295	895
PBK 40	3200/600	3,5/600- 4,0/500	III	1150	560-1860	450	1200	40 (110)	151	290	910
				1150	550-1850		1400			360	990
				1350	600-2250		1200			285	930
				1350	590-2240		1400			355	1010
PBK 45	3600/600	4,0/600- 5,0/500	III	1350	520-2120	450	1200	40 (128)	151	290	950
				1350	500-2100		1600			409	1085
				1550	600-2450		1200			285	980
				1550	580-2430		1600			404	1115
				1750	500-2500		1600			400	1180
PBK 48	4200/600	5,0/600	III	1350	540-2120	450	1200	40 (128)	161	280	980
				1350	520-2100		1600			400	1110
				1550	620-2470		1200			275	1010
				1550	600-2450		1600			395	1140

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- with protection strip as standard
- load backrest type LS-K see page 239
- cylinder protection (ISO II/III) upon request
- wear strips under frame upon request (ISO II/III)
- constant sideshift upon request

PBK 20 up to 1300 mm long arms
 PBK 25 up to 1300 mm long arms
 PBK 30 up to 1700 mm long arms
 PBK 35 up to 1800 mm long arms
 PBK 40, 45, 48 up to 1700 mm long arms
 longer arms upon request


* ca., including rebar and pre-tension

Bale clamp

PBK
ISO IV/Pin

integral sideshift

The **bale clamp PBK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allow for dense stacking of bales. An integral sideshift is fitted as standard.


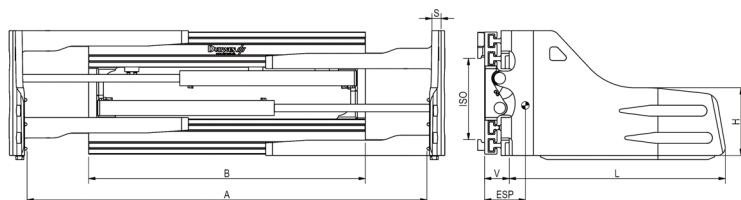


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	COG mm	weight kg
PBK 50	4200/600	5,0/600	IV	1450	770-2420	460	1200	40 (118)	141	275	1140
				1450	760-2410		1400	40 (123)	141	335	1210
				1450	750-2400		1600	45 (128)	151	395	1280
				1550	540-2210		1400	40 (123)	141	320	1240
				1550	530-2200		1600	45 (128)	151	390	1310
				1650	580-2390		1400	40 (123)	141	315	1270
				1650	570-2380		1600	45 (128)	151	385	1340
PBK 60	4000/800	6,0/600	IV	1650	710-2510	460	1400	45 (116)	164	295	1430
				1650	700-2500		1600		174	365	1490
				1850	560-2460		1400		164	285	1480
				1850	550-2450		1600		174	355	1540
PBK 80	5000/800	7,0-8,0/600	IV	1650	710-2510	500	1400	50 (133)	178	295	1705
				1650	700-2500		1600			365	1790
				1850	560-2460		1400			285	1810
				1850	550-2450		1600			355	1895
				2100	700-3100		1600			345	1970
PBK 100	6500/800	8,0/900- 10,0/600	IV	2000	740-2910	500	1400	60 (137)	188	280	2050
				2000	730-2900		1600			350	2150
				2400	640-3110		1400			270	2250
				2400	630-3100		1600			330	2350
PBK 110	8000/800	8,0/1100- 12,0/600	IV	2400	710-3010 700-3000	500	1400 1600	60 (137)	249	280 340	2650 2720
PBK 140	10000/800	14,0/600	Pin	3200	870-4100 860-4090	550	1400 1600	70 (147)	310	325 380	4450 4570

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- load backrest type LS-K see page 239
- cylinder protection upon request (ISO IV)

- wear strips under frame (ISO IV) upon request
- constant sideshift upon request
- ISO IV and higher: arms longer than 1700 mm upon request only

* ca., including rebar and pre-tension

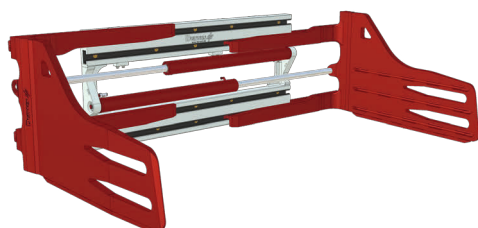

option:
cylinder protection

DURWEN
Forklift Attachments

More than 75 years experience