


Pulp clamp

PZK
ISO II/III

integral sideshift

The **pulp clamp PZK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth arms are low marking coated as standard. The clamp suits the needs for proper pulp handling.

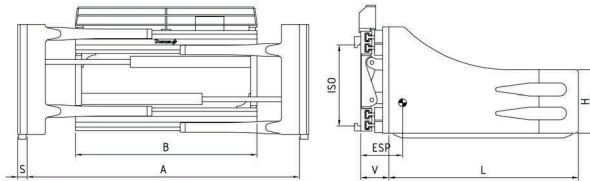


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	height H mm	length L mm	S (max) mm	V LLC mm	ESP COG mm	weight kg
PZK 20	1650/500	1,5-2,0/500	II	980	530-1710	350	800	30 (92)	128	198	435
				980	520-1700		1000			233	470
				1050	570-1770		800			194	445
				1050	560-1760		1000			229	480
PZK 25	2300/500	2,0-2,5/600	II	980	520-1700	350	1000	30 (92)	138	233	488
				980	510-1690		1200			283	523
				1050	560-1760		1000			229	500
				1050	550-1750		1200			283	535
				1150	560-1860		1000			222	520
				1150	550-1850						

Pulp clamp

PZK
ISO IV/Pin

integral sideshift

The **pulp clamp PZK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth arms are low marking coated as standard. The clamp suits the needs for proper pulp handling.

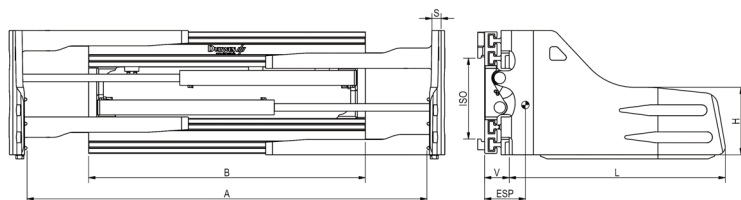

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	ESP COG mm	weight kg
PZK 50	4200/600	5,0/600	IV	1450	770-2420	460	1200	40 (118)	141	275	1140
				1450	760-2410		1400	40 (123)	141	335	1210
				1450	750-2400		1600	45 (128)	151	395	1280
				1550	540-2210		1400	40 (123)	141	320	1240
				1550	530-2200		1600	45 (128)	151	390	1310
				1650	580-2390		1400	40 (123)	141	315	1270
				1650	570-2380		1600	45 (128)	151	385	1340
PZK 60	4000/800	6,0/600	IV	1650	710-2510	460	1400	45 (116)	164	295	1430
				1650	700-2500		1600		174	365	1490
				1850	560-2460		1400				