



Paper roll clamps 360°

PRK 360°


Durwen paper roll clamps feature slimline arm profile and are available in different configurations. Revolving paper roll clamps from Durwen are designed to take rolls in bilge position with regular forklift truck mast tilt of 5° forward. 0° arm design is also available, please ask. The slimline arms have multiple smooth wear protections as standard. Durwen uses the 360° direct drive rotation design for reliable and smooth rotation of reels. The Durwen standard contact plates are feature a steel grip profile. They are easy to maintain and repair. Furthermore there is a large variety of different pads and pad surfaces available. If you do not find the surface that you want please let us know. Models with powered short arm feature sequential positioning as standard. When ordering you can choose alternatively positioning at 45° rotation without add-on price. Later change involves cost. On the following pages you will find a broad overview on the standard range that is currently available. Please do not hesitate to ask us if you do not find the product you are looking for. Durwen produces also Tissue clamps, please ask. We also offer a range of test equipment upon request and can also provide different systems for clamp pressure regulation. The Durwen paper roll clamp range published here requires 160 bar pressure. Less pressure results in less clamping force.




PRK TB with 4 contact plates (standard execution)
Long arm split
Powered short arm
Supports handling of 2 rolls with different diameters
Powered short arm enables handling of very small rolls




PRK B with 4 contact plates (standard execution)
Powered short arm
Handles 1 roll at a time
Powered short arm enables handling of very small rolls



PRK B with 2 long contact plates (option: one piece)
Powered short arm
Handles 1 roll at a time
Powered short arm enables handling of very small rolls
One piece contact plates can be offered upon request








PRK B with 3 contact plates (option: one piece)
Powered short arm
Handles 1 roll at a time
Powered short arm enables handling of very small rolls
One piece contact plate can be offered upon request



PRK TB with 3 contact plates (option: one piece)
Powered short arm
Handles 2 rolls with different diameters
Powered short arm enables handling of very small rolls
One piece contact plate can be offered upon request

Paper roll clamps surfaces



PRK

	surface	description	
	durable high friction cast grip	• suitable for most paper types • standard on PRK • wear resistance • friction 	standard
	smooth rubber, black approx. 70° shore	• hot vulcanized rubber • good universal rubber • wear resistance • friction 	upon request
	rhombic rubber, black approx. 70° shore	• hot vulcanized rubber • recommended for foil-wrapped applications • wear resistance • friction 	upon request
	rhombic rubber, white approx. 60° shore	• hot vulcanized rubber • non-staining • recommended for foil-wrapped applications • wear resistance • friction 	upon request
	smooth PU, orange approx. 85° shore	• sprayed-on polyurethane • non-staining • very robust • wear resistance • friction 	upon request

other surface coatings upon request

Paper roll clamp 360°

PRK 25
ISO II/III

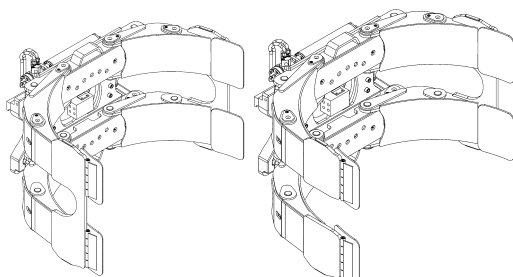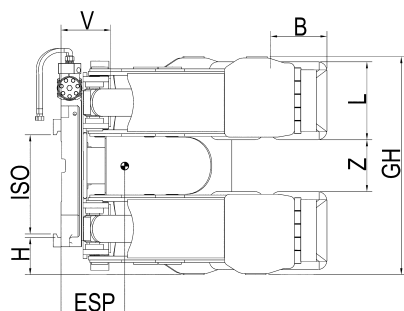

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 25 B - 11	2000/575	II/III	250 - 1150	powered	840	220x300	200	143	184	200	565
PRK 25 S - 11	2000/575		400 - 1150	fixed						200	515
PRK 25 B - 13	1800/650		250 - 1300	powered						215	580
PRK 25 S - 13	1800/650		400 - 1300	fixed						215	530
PRK 25 B - 14	1700/700		250 - 1400	powered						225	590
PRK 25 S - 14	1700/700		600 - 1400	fixed						225	540
PRK 25 B - 15	1600/760		250 - 1520	powered						235	615
PRK 25 S - 15	1600/760		600 - 1520	fixed						235	580
PRK 25 B - 16	1500/800		250 - 1600	powered						248	653
PRK 25 S - 16	1500/800	600 - 1600	fixed	248	600						
long arm split											
PRK 25 TB - 11	2000/575	II/III	250 - 1150	powered	840	220x300	200	143	184	195	560
PRK 25 TS - 11	2000/575		400 - 1150	fixed						195	510
PRK 25 TB - 13	1800/650		250 - 1300	powered						210	575
PRK 25 TS - 13	1800/650		400 - 1300	fixed						210	525
PRK 25 TB - 14	1700/700		250 - 1400	powered						220	585
PRK 25 TS - 14	1700/700		600 - 1400	fixed						220	535
PRK 25 TB - 15	1600/760		250 - 1520	powered						240	610
PRK 25 TS - 15	1600/760		600 - 1520	fixed						240	572
PRK 25 TB - 16	1500/800		250 - 1600	powered						245	648
PRK 25 TS - 16	1500/800		600 - 1600	fixed						245	595

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II), (ISO III) upon request
- force options see page 241

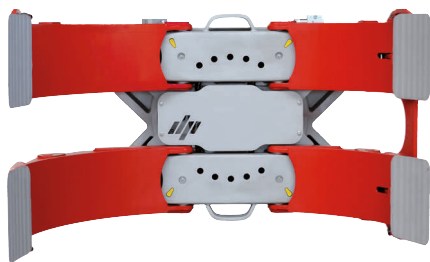




image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments

More than 75 years experience

Paper roll clamp 360°

PRK 30
ISO II/III

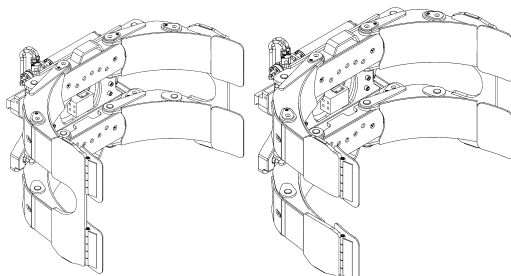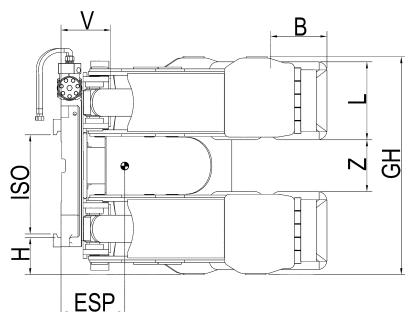

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 30 B - 12	2400/600	II / III	250 - 1200	powered	840	220x300	200	143	197	222	660
PRK 30 S - 12	2400/600		500 - 1200	fixed						222	655
PRK 30 B - 13	2200/650		250 - 1300	powered						225	675
PRK 30 S - 13	2200/650		500 - 1300	fixed						225	670
PRK 30 B - 14	2000/725		250 - 1450	powered						235	685
PRK 30 S - 14	2000/725		600 - 1450	fixed						235	680
PRK 30 B - 15	1900/760		250 - 1520	powered						254	700
PRK 30 S - 15	1900/760		600 - 1520	fixed						254	695
PRK 30 B - 16	1750/800		250 - 1600	powered						275	715
PRK 30 S - 16	1750/800		600 - 1600	fixed						275	710
long arm split											
PRK 30 TB - 12	2400/600	II / III	250 - 1200	powered	840	220x300	200	143	197	215	650
PRK 30 TS - 12	2400/600		500 - 1200	fixed						215	645
PRK 30 TB - 13	2200/650		250 - 1300	powered						220	665
PRK 30 TS - 13	2200/650		500 - 1300	fixed						220	660
PRK 30 TB - 14	2000/725		250 - 1450	powered						228	675
PRK 30 TS - 14	2000/725		600 - 1450	fixed						228	670
PRK 30 TB - 15	1900/760		250 - 1520	powered						248	690
PRK 30 TS - 15	1900/760		600 - 1520	fixed						248	685
PRK 30 TB - 16	1750/800		250 - 1600	powered						270	705
PRK 30 TS - 16	1750/800		600 - 1600	fixed						270	700

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II), (ISO III) upon request
- force options see page 241

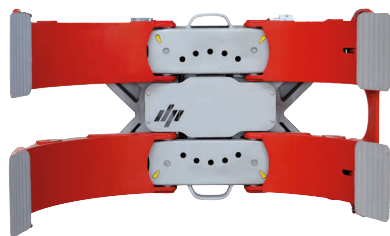




image shows unit complete with
optional centre cover

DURWEN 
Forklift Attachments

More than 75 years experience

Paper roll clamp 360°

PRK 35
ISO II/III

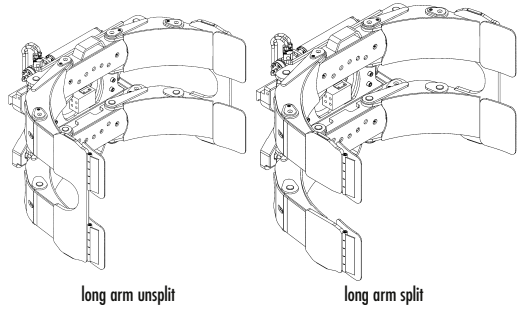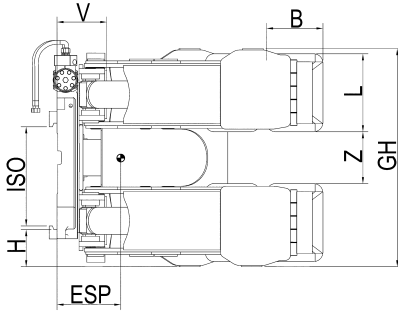

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 35 B - 13	2500/650	II/III	250 - 1300	powered	840	220x300	200	143	197	235	735
PRK 35 S - 13	2500/650		500 - 1300	fixed						235	730
PRK 35 B - 14	2200/725		250 - 1450	powered						248	760
PRK 35 S - 14	2200/725		500 - 1450	fixed						248	755
PRK 35 B - 15	2100/760		250 - 1520	powered						260	790
PRK 35 S - 15	2100/760		500 - 1520	fixed						260	785
PRK 35 B - 16	2000/800		250 - 1600	powered						275	815
PRK 35 S - 16	2000/800		600 - 1600	fixed						275	810
PRK 35 B - 18	1700/915		350 - 1830	powered						301	850
PRK 35 S - 18	1700/915	630 - 1830	fixed	301	845						
long arm split											
PRK 35 TB - 13	2500/650	II/III	250 - 1300	powered	840	220x300	200	143	197	230	725
PRK 35 TS - 13	2500/650		500 - 1300	fixed						230	725
PRK 35 TB - 14	2200/725		250 - 1450	powered						243	750
PRK 35 TS - 14	2200/725		500 - 1450	fixed						243	745
PRK 35 TB - 15	2100/760		250 - 1520	powered						255	780
PRK 35 TS - 15	2100/760		500 - 1520	fixed						255	775
PRK 35 TB - 16	2000/800		250 - 1600	powered						270	805
PRK 35 TS - 16	2000/800		600 - 1600	fixed						270	800
PRK 35 TB - 18	1700/915		350 - 1830	powered						296	840
PRK 35 TS - 18	1700/915	630 - 1830	fixed	296	835						

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II), (ISO III) upon request
- force options see page 241

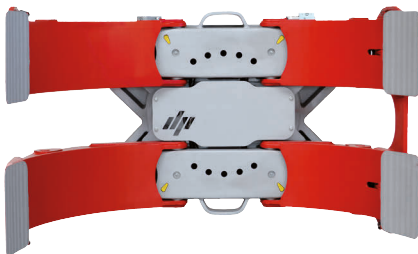




image shows unit complete with optional centre cover

DURWEN
Forklift Attachments


More than 75 years experience

Paper roll clamp 360°

PRK 40
ISO III/IV

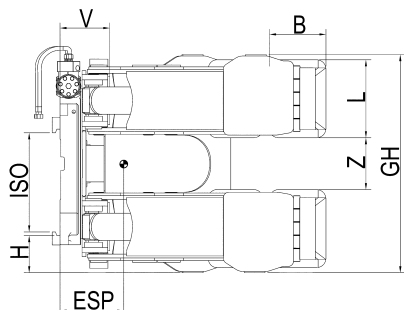

long arm unsplit



long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 40 B - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	210	825
PRK 40 S - 13	3000/650		500 - 1300	fixed						210	820
PRK 40 B - 14	2800/725		250 - 1450	powered						225	860
PRK 40 S - 14	2800/725		500 - 1450	fixed						225	855
PRK 40 B - 15	2650/760		250 - 1520	powered						235	905
PRK 40 S - 15	2650/760		500 - 1520	fixed						235	900
PRK 40 B - 16	2500/800		250 - 1600	powered						275	930
PRK 40 S - 16	2500/800		600 - 1600	fixed						275	925
PRK 40 B - 18	2100/915		350 - 1830	powered						295	970
PRK 40 S - 18	2100/915		630 - 1830	fixed						295	965
long arm split											
PRK 40 TB - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	205	815
PRK 40 TS - 13	3000/650		500 - 1300	fixed						205	810
PRK 40 TB - 14	2800/725		250 - 1450	powered						220	850
PRK 40 TS - 14	2800/725		500 - 1450	fixed						220	845
PRK 40 TB - 15	2650/760		250 - 1520	powered						230	895
PRK 40 TS - 15	2650/760		500 - 1520	fixed						230	890
PRK 40 TB - 16	2500/800		250 - 1600	powered						270	920
PRK 40 TS - 16	2500/800		600 - 1600	fixed						270	915
PRK 40 TB - 18	2100/915		350 - 1830	powered						290	960
PRK 40 TS - 18	2100/915		630 - 1830	fixed						290	955

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 241

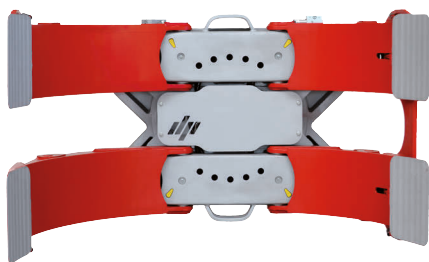




image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments

More than 75 years experience

Paper roll clamp 360°

PRK 45
ISO III/IV

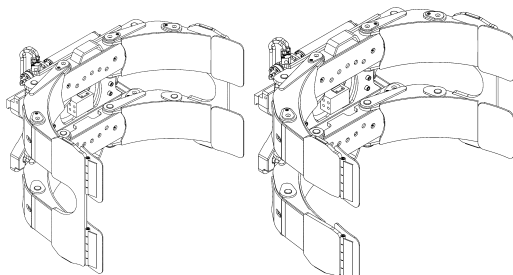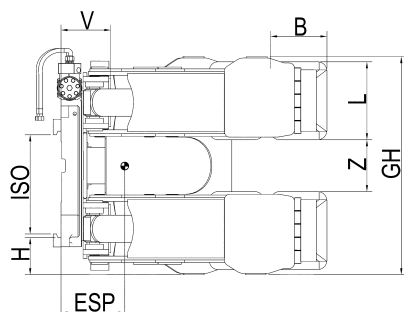

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 45 B - 13	3500/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	215	845
PRK 45 S - 13	3500/650		550 - 1300	fixed						215	840
PRK 45 B - 14	3300/725		250 - 1450	powered						230	875
PRK 45 S - 14	3300/725		550 - 1450	fixed						230	870
PRK 45 B - 15	3000/760		250 - 1520	powered						240	900
PRK 45 S - 15	3000/760		650 - 1520	fixed						240	895
PRK 45 B - 16	2800/800		250 - 1600	powered						280	950
PRK 45 S - 16	2800/800		650 - 1600	fixed						280	945
PRK 45 B - 18	2500/915		400 - 1830	powered						300	970
PRK 45 S - 18	2500/915		650 - 1830	fixed						300	965
long arm split											
PRK 45 TB - 13	3500/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	210	835
PRK 45 TS - 13	3500/650		550 - 1300	fixed						210	830
PRK 45 TB - 14	3300/725		250 - 1450	powered						225	865
PRK 45 TS - 14	3300/725		550 - 1450	fixed						225	860
PRK 45 TB - 15	3000/760		250 - 1520	powered						236	890
PRK 45 TS - 15	3000/760		650 - 1520	fixed						236	885
PRK 45 TB - 16	2800/800		250 - 1600	powered						270	940
PRK 45 TS - 16	2800/800		650 - 1600	fixed						270	935
PRK 45 TB - 18	2500/915		400 - 1830	powered						295	960
PRK 45 TS - 18	2500/915		650 - 1830	fixed						295	955

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 241

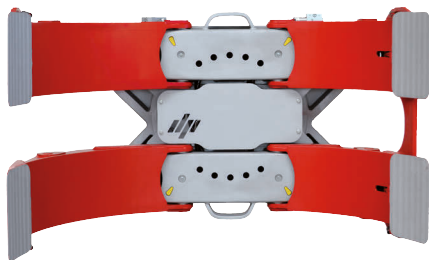




image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments


More than 75 years experience

Paper roll clamp 360°

PRK 50
ISO III/IV

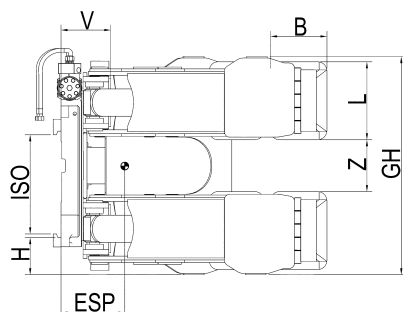

long arm unsplit



long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 50 B - 13	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	247	1020
PRK 50 S - 13	4000/650		500 - 1300	fixed						247	1005
PRK 50 B - 14	3900/725		250 - 1450	powered						259	1045
PRK 50 S - 14	3900/725		500 - 1450	fixed						259	1030
PRK 50 B - 15	3800/760		250 - 1520	powered						278	1070
PRK 50 S - 15	3800/760		500 - 1520	fixed						278	1055
PRK 50 B - 16	3700/800		250 - 1600	powered						283	1100
PRK 50 S - 16	3700/800		500 - 1600	fixed						283	1085
PRK 50 B - 18	3400/915		350 - 1830	powered						307	1170
PRK 50 S - 18	3400/915		630 - 1830	fixed						307	1155
long arm split											
PRK 50 TB - 13	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	242	1015
PRK 50 TS - 13	4000/650		500 - 1300	fixed						242	1000
PRK 50 TB - 14	3900/725		250 - 1450	powered						254	1040
PRK 50 TS - 14	3900/725		500 - 1450	fixed						254	1025
PRK 50 TB - 15	3800/760		250 - 1520	powered						275	1065
PRK 50 TS - 15	3800/760		500 - 1520	fixed						275	1050
PRK 50 TB - 16	3700/800		250 - 1600	powered						278	1095
PRK 50 TS - 16	3700/800		500 - 1600	fixed						278	1080
PRK 50 TB - 18	3400/915		350 - 1830	powered						302	1165
PRK 50 TS - 18	3400/915		630 - 1830	fixed						302	1150

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 241

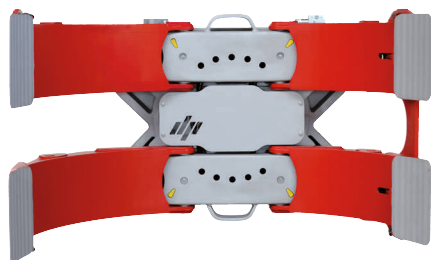




image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments

More than 75 years experience

Paper roll clamp 360°

PRK 60
ISO IV

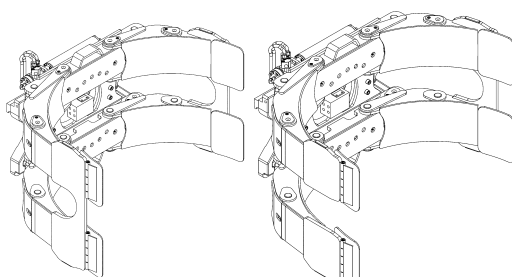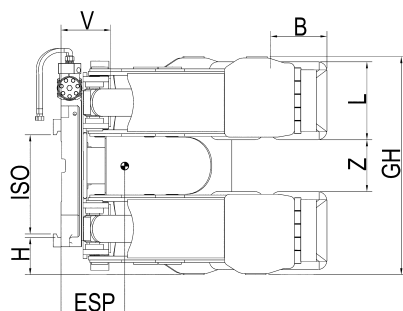

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 60 B - 13	4500/650	IV	250 - 1300	powered	1140	280x400	300	205	228	249	1200
PRK 60 S - 13	4500/650		500 - 1300	fixed						249	1185
PRK 60 B - 14	4300/725		250 - 1450	powered						256	1225
PRK 60 S - 14	4300/725		500 - 1450	fixed						256	1210
PRK 60 B - 15	4200/760		250 - 1520	powered						263	1260
PRK 60 S - 15	4200/760		450 - 1520	fixed						263	1245
PRK 60 B - 16	4000/800		250 - 1600	powered						270	1285
PRK 60 S - 16	4000/800		500 - 1600	fixed						270	1270
PRK 60 B - 18	3800/915		350 - 1830	powered						289	1325
PRK 60 S - 18	3800/915		650 - 1830	fixed						289	1310
PRK 60 B - 19	3200/950		350 - 1900	powered						300	1345
PRK 60 S - 19	3200/950		700 - 1900	fixed						300	1330
PRK 60 B - 20	2800/1000		350 - 2000	powered						314	1380
PRK 60 S - 20	2800/1000		700 - 2000	fixed						314	1365
long arm split											
PRK 60 TB - 13	4500/650	IV	250 - 1300	powered	1140	280x400	300	205	228	244	1195
PRK 60 TS - 13	4500/650		500 - 1300	fixed						244	1180
PRK 60 TB - 14	4300/725		250 - 1450	powered						251	1220
PRK 60 TS - 14	4300/725		500 - 1450	fixed						251	1205
PRK 60 TB - 15	4200/760		250 - 1520	powered						258	1255
PRK 60 TS - 15	4200/760		450 - 1520	fixed						258	1240
PRK 60 TB - 16	4000/800		250 - 1600	powered						265	1280
PRK 60 TS - 16	4000/800		500 - 1600	fixed						265	1265
PRK 60 TB - 18	3800/915		350 - 1830	powered						284	1320
PRK 60 TS - 18	3800/915		650 - 1830	fixed						284	1305
PRK 60 TB - 19	3200/950		350 - 1900	powered						295	1340
PRK 60 TS - 19	3200/950		700 - 1900	fixed						295	1325
PRK 60 TB - 20	2800/1000		350 - 2000	powered						311	1375
PRK 60 TS - 20	2800/1000		700 - 2000	fixed						311	1360

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- load extender upon request
- 0° arm design upon request

- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- one piece contact plate per arm upon request
- quick release hooks (ISO IV) upon request
- force options see page 241






image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments

More than 75 years experience

Paper roll clamp 360°

PRK 80
ISO IV

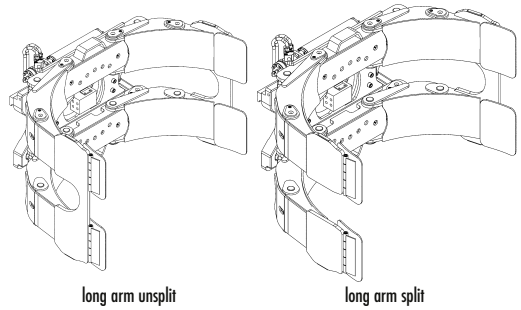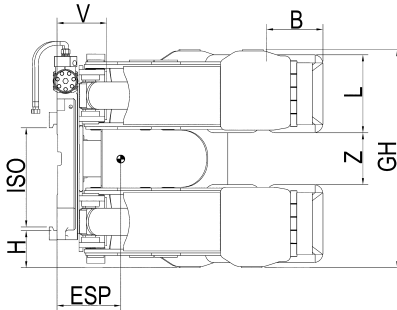

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 80 B - 13	5000/650	IV	250 - 1300	powered	1240	280x500	200	255	239	259	1330
PRK 80 S - 13	5000/650		500 - 1300	fixed						259	1325
PRK 80 B - 14	4800/725		250 - 1450	powered						271	1365
PRK 80 S - 14	4800/725		500 - 1450	fixed						271	1360
PRK 80 B - 15	4600/760		250 - 1520	powered						282	1395
PRK 80 S - 15	4600/760		450 - 1520	fixed						282	1390
PRK 80 B - 16	4500/800		250 - 1600	powered						291	1445
PRK 80 S - 16	4500/800		500 - 1600	fixed						291	1440
PRK 80 B - 18	3900/915		350 - 1830	powered						326	1495
PRK 80 S - 18	3900/915		650 - 1830	fixed						326	1490
PRK 80 B - 19	3600/950		350 - 1900	powered						343	1520
PRK 80 S - 19	3600/950		700 - 1900	fixed						343	1515
PRK 80 B - 20	3500/1000		350 - 2000	powered						360	1590
PRK 80 S - 20	3500/1000		700 - 2000	fixed						360	1585
PRK 80 B - 21	3300/1050		450 - 2100	powered						377	1685
PRK 80 S - 21	3300/1050		900 - 2100	fixed						377	1625
long arm split											
PRK 80 TB - 13	5000/650	IV	250 - 1300	powered	1240	280x500	200	255	239	254	1335
PRK 80 TS - 13	5000/650		500 - 1300	fixed						254	1330
PRK 80 TB - 14	4800/725		250 - 1450	powered						266	1370
PRK 80 TS - 14	4800/725		500 - 1450	fixed						266	1365
PRK 80 TB - 15	4600/760		250 - 1520	powered						277	1400
PRK 80 TS - 15	4600/760		450 - 1520	fixed						277	1395
PRK 80 TB - 16	4500/800		250 - 1600	powered						286	1440
PRK 80 TS - 16	4500/800		500 - 1600	fixed						286	1435
PRK 80 TB - 18	3900/915		350 - 1830	powered						321	1490
PRK 80 TS - 18	3900/915		650 - 1830	fixed						321	1485
PRK 80 TB - 19	3600/950		350 - 1900	powered						338	1515
PRK 80 TS - 19	3600/950		700 - 1900	fixed						338	1510
PRK 80 TB - 20	3500/1000		350 - 2000	powered						355	1585
PRK 80 TS - 20	3500/1000		700 - 2000	fixed						355	1580
PRK 80 TB - 21	3300/1050		450 - 2100	powered						372	1680
PRK 80 TS - 21	3300/1050		900 - 2100	fixed						372	1675



- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241

Paper roll clamp 360°

**PRK 100
ISO IV**

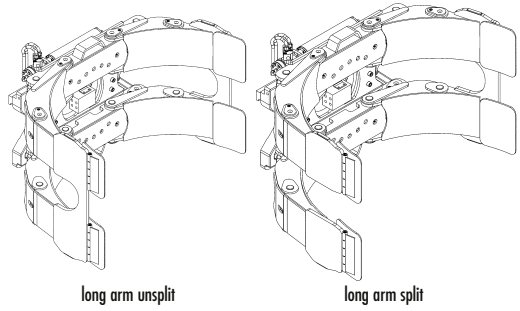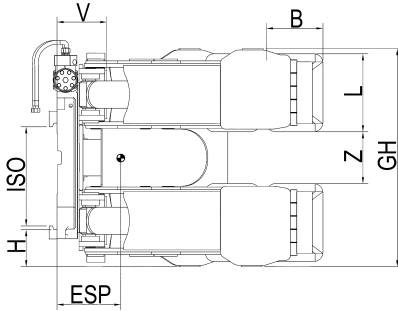

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 100 B - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	246	1360
PRK 100 B - 14	5500/725		450 - 1450							263	1440
PRK 100 B - 15	5300/760		480 - 1520							280	1470
PRK 100 B - 16	5000/800		550 - 1600							297	1510
PRK 100 B - 18	4600/915		580 - 1830							311	1630
PRK 100 B - 19	4300/950		600 - 1900							328	1670
PRK 100 B - 20	4000/1000		600 - 2000							345	1710
PRK 100 B - 21	3800/1050		650 - 2100							362	1750
long arm split											
PRK 100 TB - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	241	1350
PRK 100 TB - 14	5500/725		450 - 1450							258	1430
PRK 100 TB - 15	5300/760		480 - 1520							275	1460
PRK 100 TB - 16	5000/800		550 - 1600							292	1500
PRK 100 TB - 18	4600/915		580 - 1830							306	1620
PRK 100 TB - 19	4300/950		600 - 1900							323	1660
PRK 100 TB - 20	4000/1000		600 - 2000							340	1700
PRK 100 TB - 21	3800/1050		650 - 2100							350	1740

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241

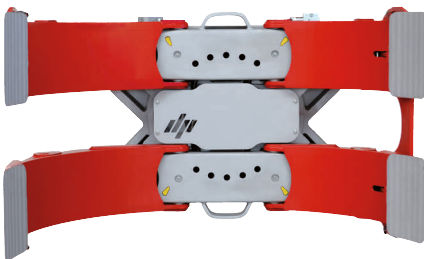


image shows unit complete with optional centre cover

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024