


Paper roll clamp 180°

PRK 180°

The **paper roll clamp PRK 180°** is designed to take paper rolls in bilge position and upright. The forklift truck operator enjoys increased ergonomics in handling due to the 180° rack and pinion drive which enables fast and safe rotation with a soft stop. The short arm can either be chosen fixed or powered. A 5° forward tilt angle on your forklift truck mast is usually sufficient. 0° execution can be done upon request. 160 bar clamp pressure is required for regular operation. Less pressure results in less clamping force.

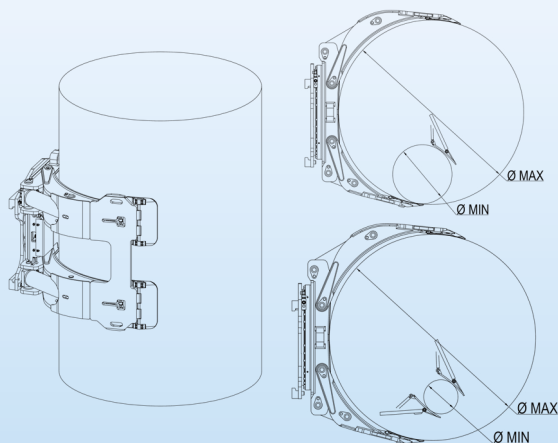

PRK-S (short arm fixed)

This model has a fixed short arm. The powered long arm does the circular clamp movement and is not split. This model is ideal for always handling one paper roll only.

PRK-B (short arm powered)



This model has a powered short arm and a powered long arm. It is ideal for always handling one paper roll only. Thanks to the powered short arm with sequential function also very small diameters can be clamped. Due to the sequential function the long arm always moves first. 45° positioning of the short arm is not available for the 180° paper roll clamp.

PRK-TS (short arm fixed, long arm split)

This model has a fixed short arm. The powered long arm does the circular clamp movement and is split. This model is ideal for handling one or two paper rolls at a time. Due to the long arm being split also 2 rolls with different roll diameters can be clamped safely.

PRK-TB (short arm powered, long arm split)

This model has a powered short arm and a powered long arm. Because of the long arm being split also 2 rolls with different diameters can be clamped safely. The powered short arm sequential function enables clamping of very small diameters. Due to the sequential function the long arm always moves first. 45° positioning of the short arm is not available for the 180° paper roll clamp.

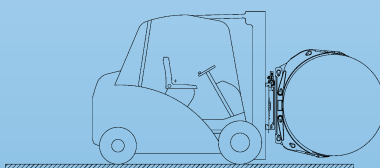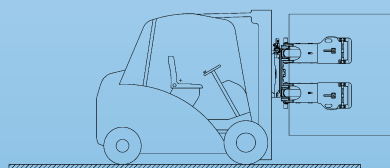


DURWEN
Forklift Attachments


More than 75 years experience

Paper roll clamp 180°

**PRK 80/100-
180 ISO IV/V**

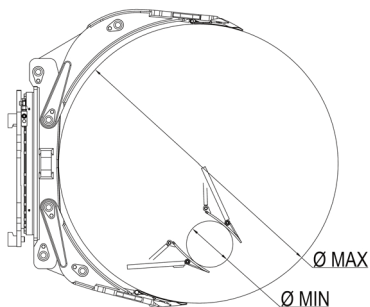

short arm powered

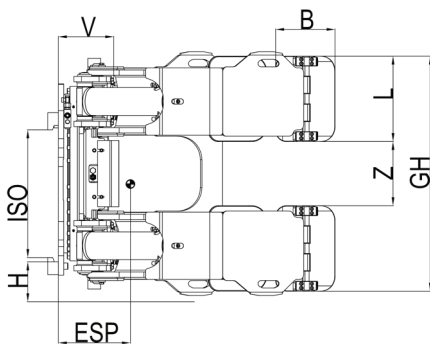

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 80 - long arm unsplit											
PRK 80 B-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	281	1305
PRK 80 B-15-180	4600/760		250 - 1520							305	1353
PRK 80 B-16-180	4500/800		250 - 1600							317	1370
PRK 80 B-18-180	3900/915		350 - 1830							335	1385
PRK 80 B-21-180	3300/1050		450 - 2100							365	1490
PRK 80 - long arm split											
PRK 80 TB-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	276	1295
PRK 80 TB-15-180	4600/760		250 - 1520							297	1343
PRK 80 TB-16-180	4500/800		250 - 1600							306	1360
PRK 80 TB-18-180	3900/915		350 - 1830							328	1375
PRK 80 TB-21-180	3300/1050		450 - 2100							355	1480
PRK 100 long arm unsplit											
PRK 100 B-15-180	5300/760	IV/V	480 - 1520	powered	1240	280x500	200	102	258	287	1480
PRK 100 B-16-180	5000/800		500 - 1600							305	1520
PRK 100 B-18-180	4600/915		580 - 1830							323	1580
PRK 100 B-21-180	3800/1050		650 - 2100							377	1700
PRK 100- long arm split											
PRK 100 TB-15-180	5300/760	IV/V	480 - 1520	powered	1240	280x500	200	102	258	282	1470
PRK 100 TB-16-180	5000/800		500 - 1600							300	1510
PRK 100 TB-18-180	4600/915		580 - 1830							318	1570
PRK 100 TB-21-180	3800/1050		650 - 2100							372	1690

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request

- with centre cover as standard
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241

DURWEN 
Forklift Attachments

More than 75 years experience