


Rotator type DG



Durwen app



direct drive for
maximum service life

high grade motor with
safety valve

bolted fork carriage

steel support
for rotator forks

excellent visibility


stable cast frame



360° rotator


DG

The **rotator DG** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust.

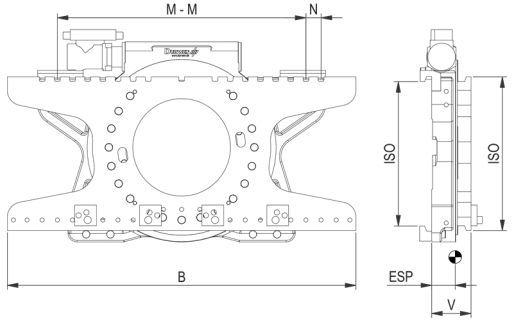

type	capacity kg LC mm	lift truck to LC mm	ISO	width B mm	centre distance M-M mm	N mm	max. torque ΔP 130 bar Nm	V LLC mm	ESP COG mm	weight kg
DG 16	1600/500	1,5-1,8/500	II	880	260-660	50	5200	117	51	217
DG 20	2000/500	2,0/500	II	980	260-760	50	5200	117	52	223
DG 25	2500/600	2,5/600	II	1080	260-860	50	9400	120	53	269
DG 30	3000/500	3,0/500	III	1150	320-920	50	9400	130	61	316
DG 35	3500/500	3,0/600- 3,5/500	III	1150	320-920	50	11700	135	65	331
DG 40	4000/500	3,5/600-4,0/500	III	1150	310-910	50	14000	148	66	455
DG 45	5000/600	4,0-5,0/600	III	1350	310-1110	50	14000	148	69	471
DG 50	5000/600	5,0/600	IV	1380	310-1110	50	14000	153	76	545
DG 60	6000/600	6,0/600	IV	1500	310-1210	50	22000	155	73	706
DG 80	8000/600	7,0-8,0/600	IV	1750	380-1480	50	22000	165	80	763
DG 100	8000/900	8,0/900	IV	1750	380-1480	50	26000	178	84	860
DG 120	12000/600	8,0/1100- 12,0/600	IV	1850	380-1580	50	26000	178	87	920
DG 160	16000/600	14,0/600- 16,0/600	Pin	2400	bolt-on	100	52000	266	140	3700
DG 200	20000/600	18,0/600- 20,0/600	Pin	2400	bolt-on	100	52000	271	143	3795
DG 240	24000/600 16000/900	16,0/1200	Pin	2400	bolt-on	100	52000	276	148	3860

- 1 hydraulic function required
- includes hoses and couplings
- safety valve as standard
- quick release hooks: (ISO II, III, IV) upon request
- forks not included
- hook-on forks reinforced for rotator use must be used
- options see page 235, 238

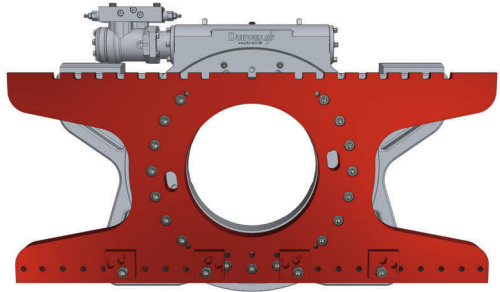

DURWEN
Forklift Attachments


More than 75 years experience

Sideshifting 360° rotator

DG-S

constant sideshift

The **rotator DG-S** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. DG-S is equipped with constant sideshift ± 100 mm.


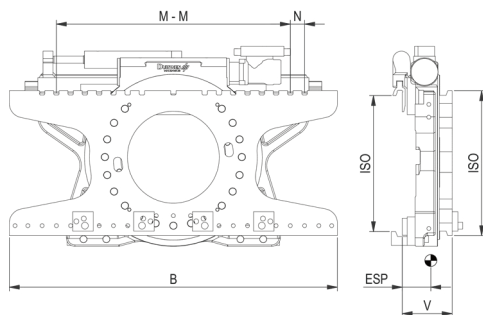


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	centre distance M-M mm	N mm	max. torque ΔP 130 bar Nm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DG 16-S	1600/500	1,5-1,8/500	II	880	260-660	50	5200	± 100	166	85	264
DG 20-S	2000/500	2,0/500	II	980	260-760		5200		166	87	270
DG 25-S	2500/600	2,5/600	II	1080	260-860		9400		149	72	314
DG 30-S	3000/500	3,0/500	III	1150	320-920		9400		175	90	375
DG 35-S	3500/500	3,0/600- 3,5/500	III	1150	320-920		11700		180	92	385
DG 40-S	4000/500	3,5/600- 4,0/500	III	1150	310-910		14000		193	95	550
DG 45-S	5000/600	4,0-5,0/600	III	1350	310-1110		14000		193	97	565
DG 50-S	5000/600	5,0/600	IV	1380	310-1110		14000		220	110	730
DG 60-S	6000/600	6,0/600	IV	1500	310-1210		22000		228	118	883
DG 80-S	8000/600	7,0-8,0/600	IV	1750	380-1480		22000		238	128	968
DG 100-S	8000/900	8,0/900	IV	1750	380-1480		26000		251	130	1020
DG 120-S	12000/600	8,0/1100- 12,0/600	IV	1850	380-1580		26000		251	133	1128

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard

- constant sideshift as standard
- options see page 235, 238
- quick release hooks: (ISO II, III, IV) upon request

- forks not included
- hook-on forks reinforced for rotator use must be used

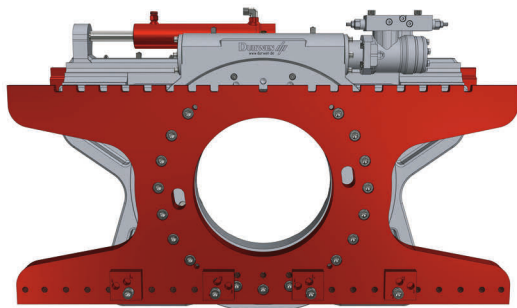

DURWEN 
Forklift Attachments

More than 75 years experience