



APPLIANCE CLAMP UKK

SAFE – EFFICIENT – RELIABLE

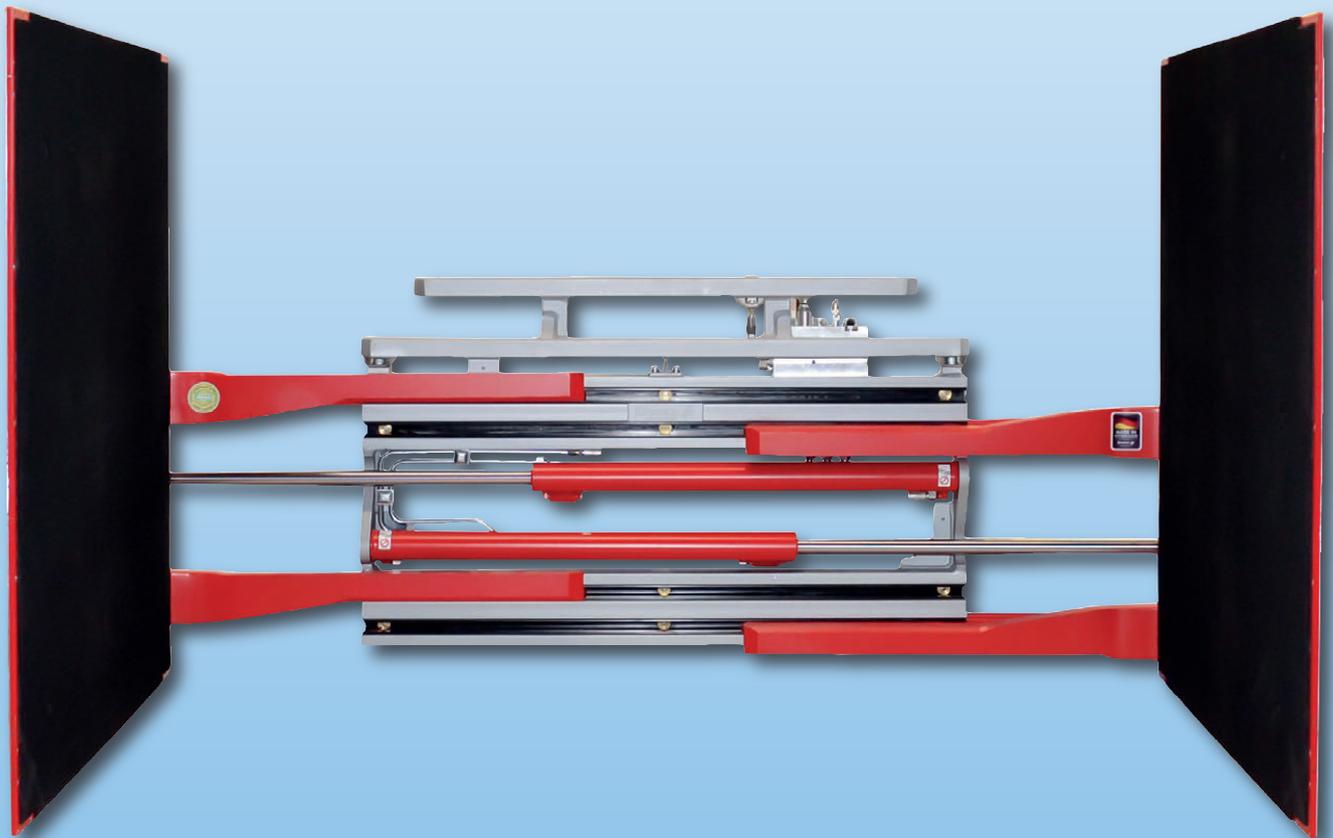


Clamps for boxed goods are used for palletless transport of packaged goods

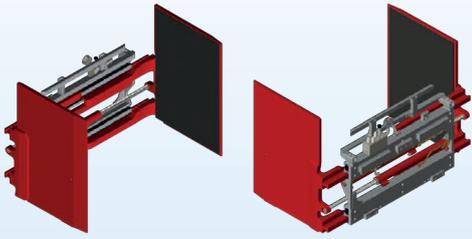


Carton clamp UKKS

The **UKKS** type is a carton clamp with rigid arms. The clamping arms consist of slim contact plates which are coated with rubber. The compact design allows for narrow standing goods to be clamped. The rigid arms are fixed and cannot be adjusted.

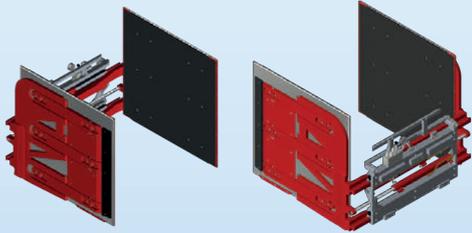


Appliance clamp UKK-PE

The **UKK-PE** type are appliance clamps with single articulating arms. The contact plate is movably mounted. This design principle offers considerable advantages with regard to the distribution of the clamp force over the entire contact surface. The plate articulation distributes the force from front to rear. This prevents local overloading of the goods while still ensuring secure gripping. This clamp is ideal for electrical appliances to be handled. In addition, this class offers a multitude of options. The clamping arms themselves can be optimally adjusted to the transported goods. If different goods require different clamping forces, the UKK-PE can be easily extended with different pressure selection valves as an option.

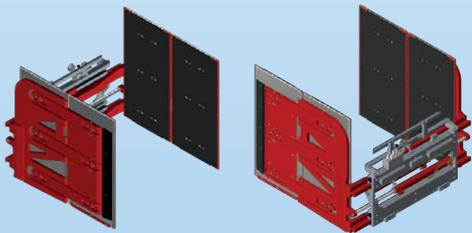





Appliance clamp UKK-PD

The **UKK-PD** type is an appliance clamp with double articulating arms. The gripping surface is additionally separated in the middle, resulting in a front and a rear partial surface. Each of these sections can also move around the vertical axis. The force is optimally distributed to the individual rows and evenly applied to the row itself. The clamp arm offers the best possible adaptation to the transported goods and thus helps to reduce the strain on the goods and to eliminate damage to the packaging as much as possible.

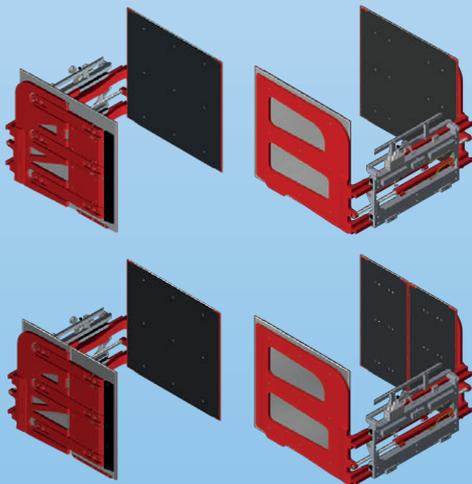


Appliance clamps UKK-PSE / UKK-PSD

The **UKK-PSE** and **UKK-PSD** types are a combination of rigid and articulating arms. This combines the advantages of a rigid arm with aluminium plate and the advantages of a pendulum arm. These units cannot achieve the even force distribution of a UKK-PE but run more easily into densely stacked goods.

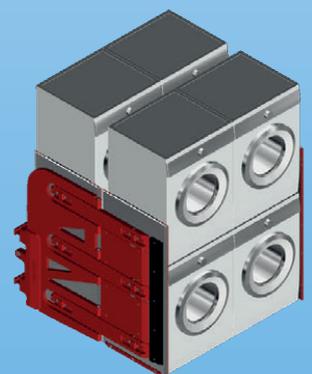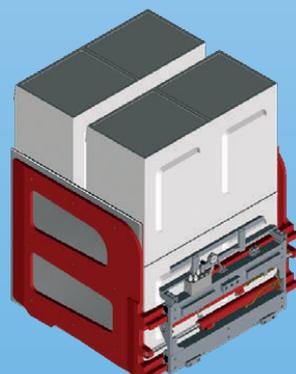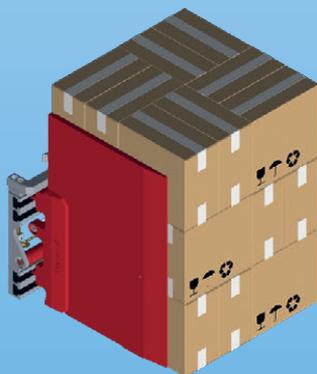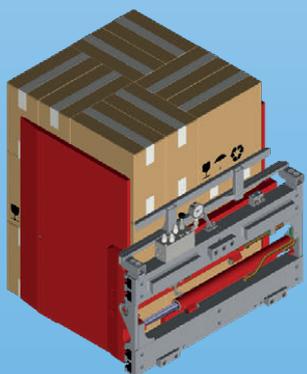


DURWEN APPLIANCE CLAMP TYPE UKK-PE

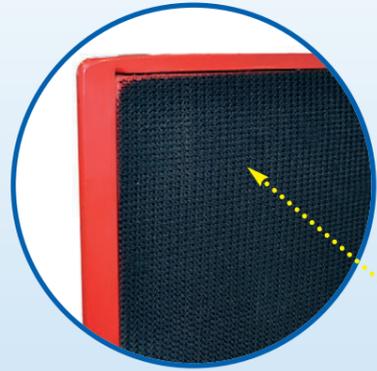

high-friction rubber coating as standard




one face






wear strip UKKS



wear strip UKK-PE

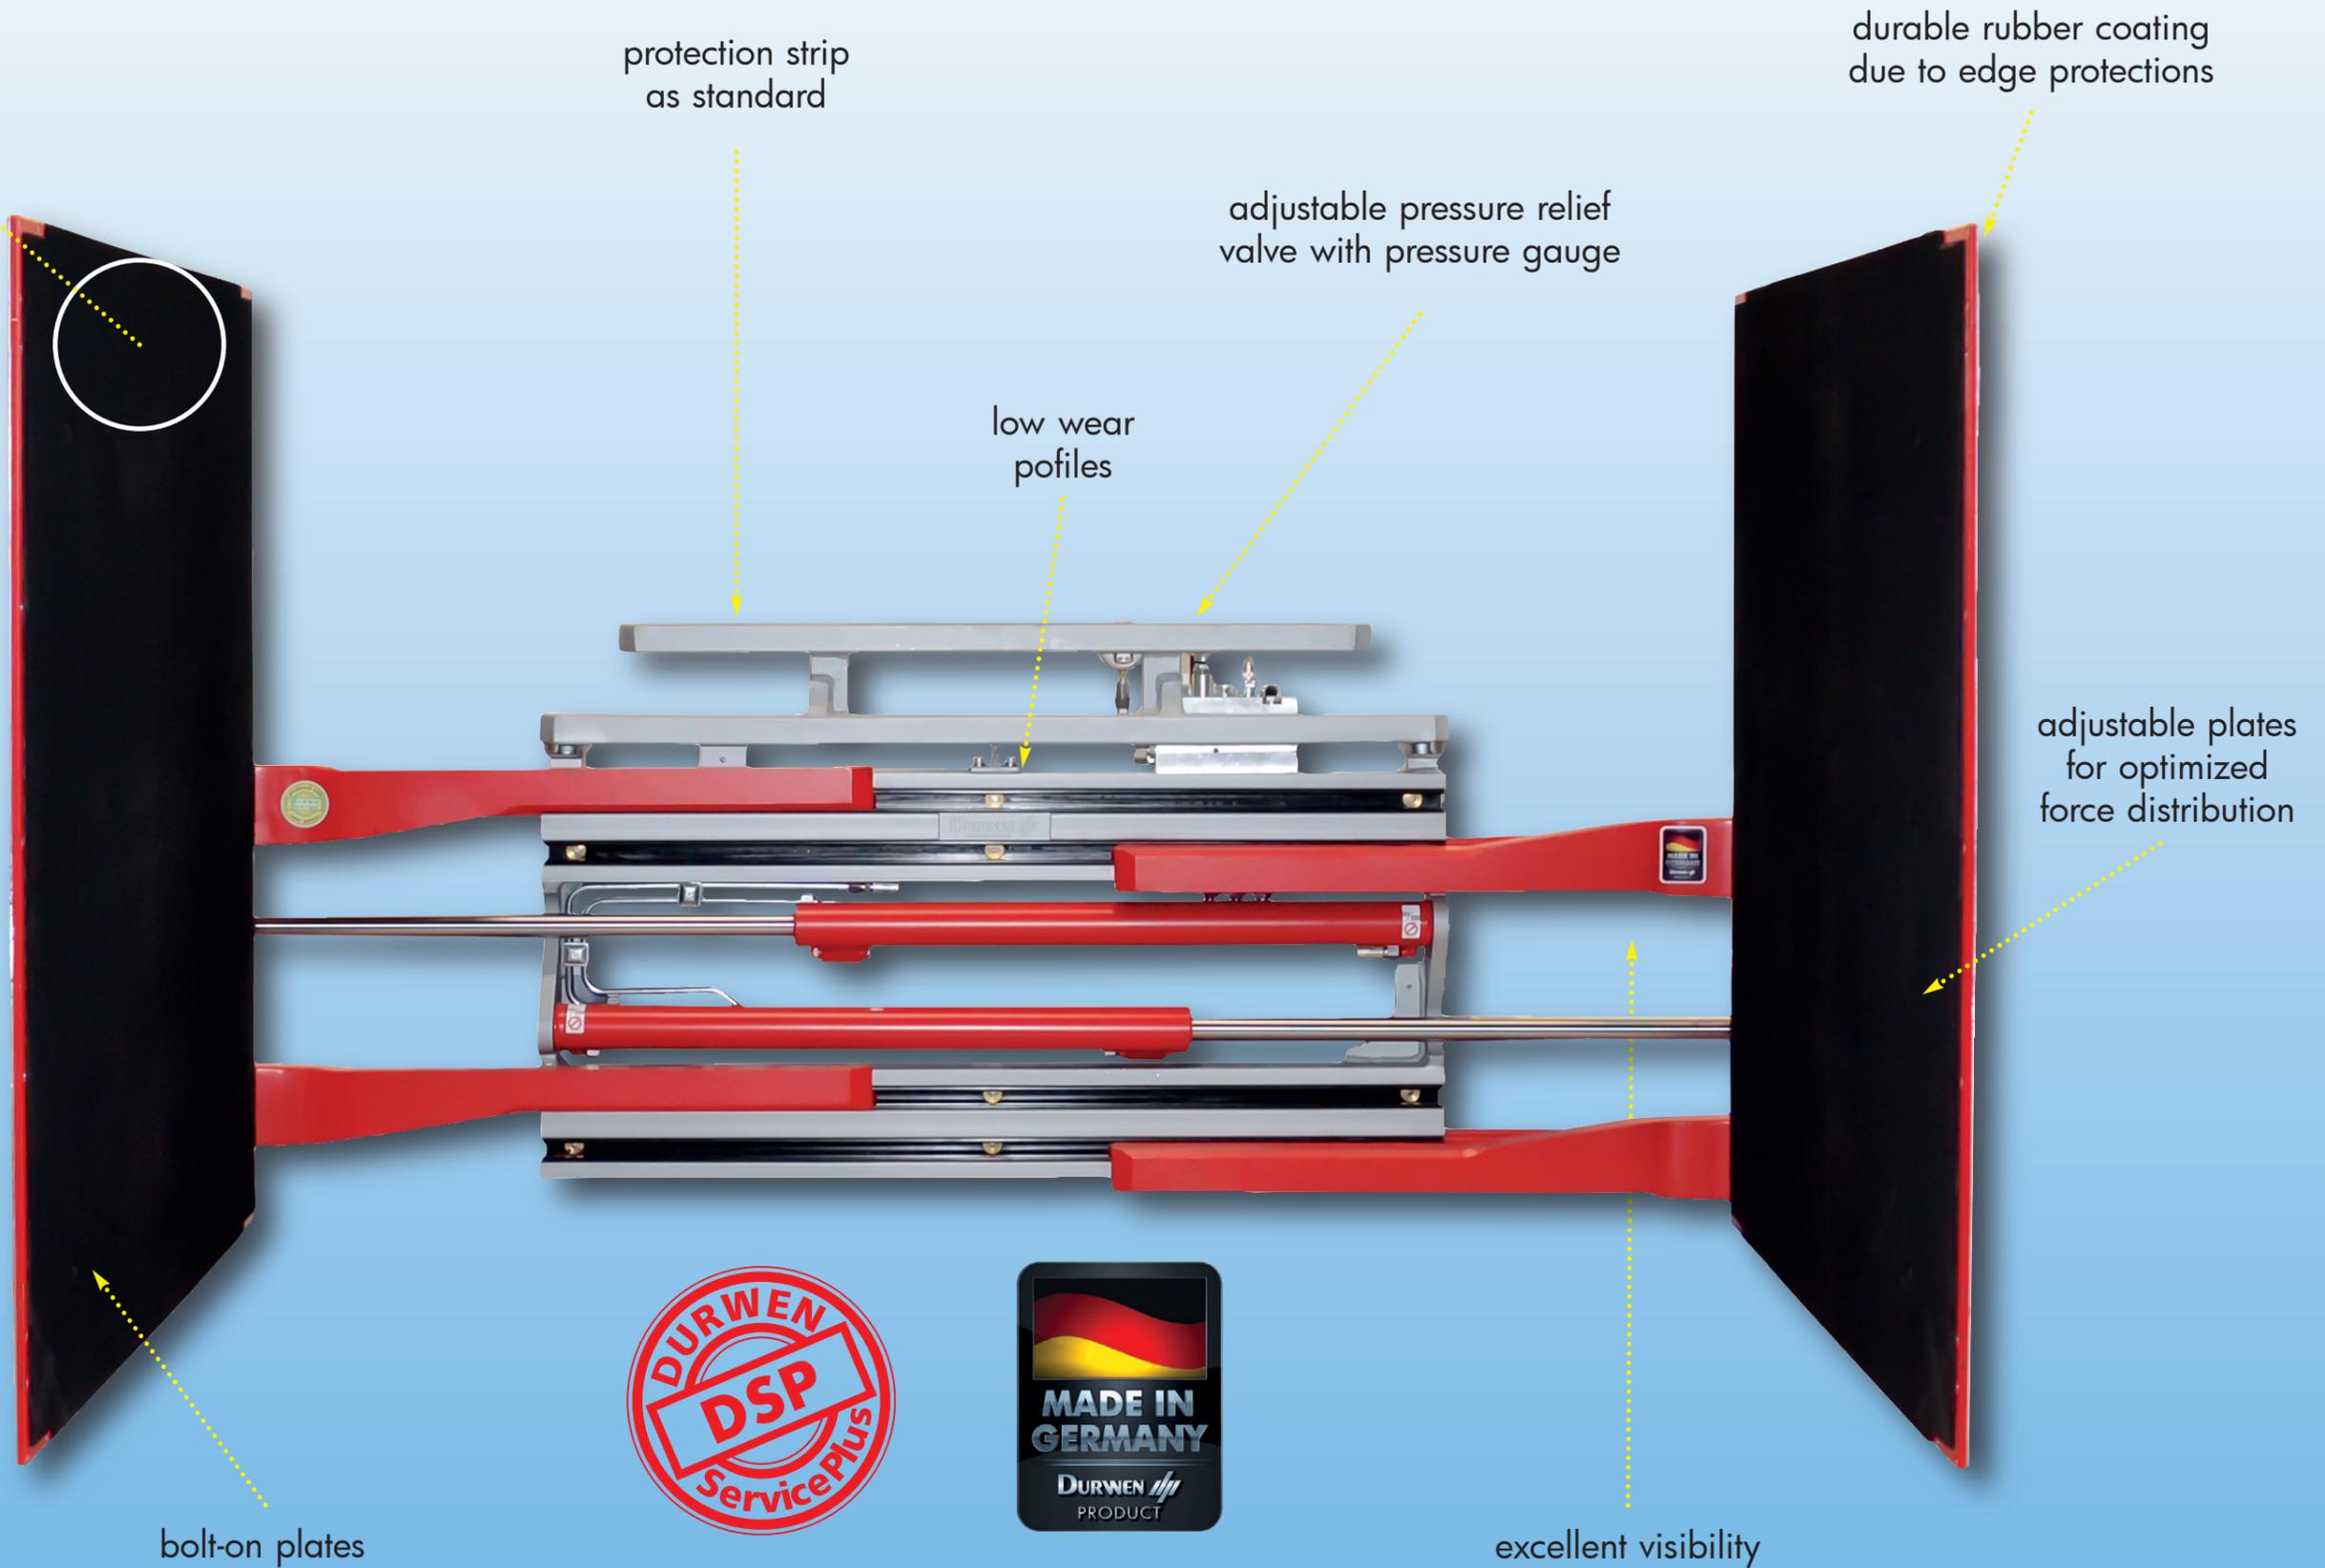

Clamps for boxed goods - surface coatings

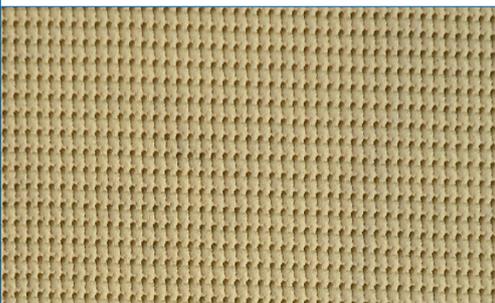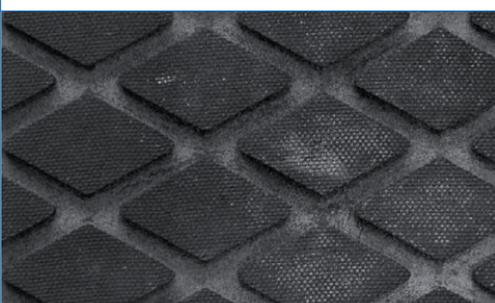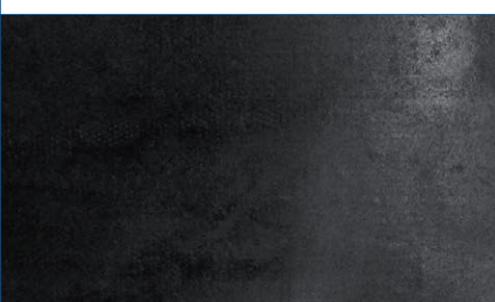	<p>supergrip black standard on Durwen clamps approx. 65° shore</p>	<ul style="list-style-type: none">• multi-purpose rubber• excellent friction
	<p>grooved rubber black approx. 65° shore</p>	<ul style="list-style-type: none">• multi-purpose rubber• improved grip• good durability
	<p>high-friction beige approx. 45° shore</p>	<ul style="list-style-type: none">• excellent friction• non-marking• less hardness
	<p>rhombic rubber black approx. 65° shore</p>	<ul style="list-style-type: none">• good durability• excellent friction
	<p>smooth PU, black approx. 85° shore</p>	<ul style="list-style-type: none">• does not stain• high wear-resistance• good friction coefficient
	<p>metal grain</p>	<ul style="list-style-type: none">• anti-slip coating of sprayed-on metal grainsthree different grains available: 0,3/0,6/0,8 mm• sharp grip• high wear-resistance• not suitable for all goods



You are looking for a digital version:



DURWEN SERVICE - YOUR BACKUP!



Durwen factory I, Plaidt



Durwen factory II, Mayen



Durwen research and development centre



... well prepared to support you



More than 75 years experience

Durwen Maschinenbau GmbH
August-Horch-Straße 5
56637 Plaidt - Germany

Phone: +49 26 32-70 00-0
Fax: +49 26 32-70 00-299

export@durwen.de
www.durwen.de



your partner